




2 + 3-chamber system,
inner height: 37,1

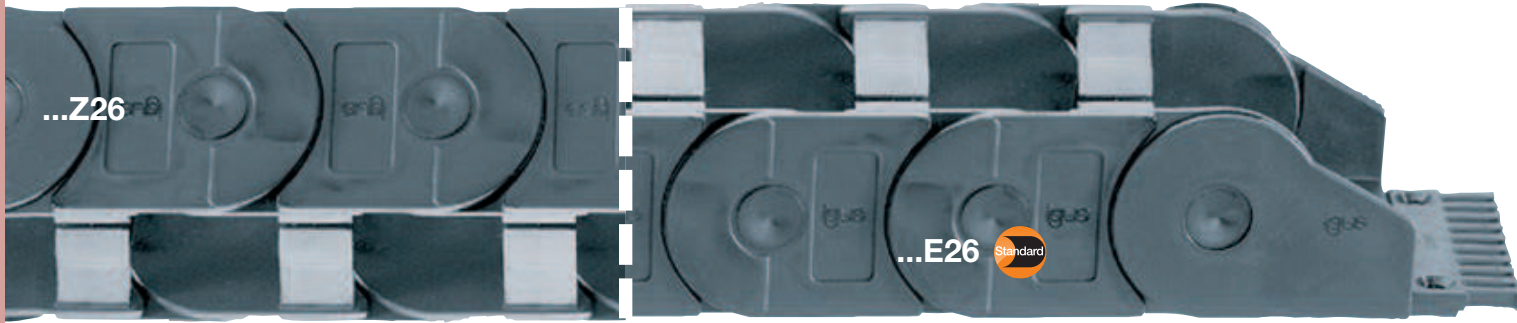



Series E26 | Split crossbar along the outer radius | 1 / 2 / 3-chamber system
Series Z26 | Split crossbar along the inner radius | 1 / 2 / 3-chamber system

Chamber system	Split crossbar along outer radius	Split crossbar along inner radius	Bi [mm]	Ba [mm]	R Bending radii [mm]	Weight [kg/m]
1-chamber	E26.07.R.0	Z26.07.R.0	75	92	063 075 100 125 150 175 200 250	≈ 0,96
2-chamber	E26.2/45.R.0	Z26.2/45.R.0	48/48	117	063 075 100 125 150 175 200 250	≈ 1,14
3-chamber	E26.3/45.R.0	Z26.3/45.R.0	47/48/47	167	063 075 100 125 150 175 200 250	≈ 1,30


Supplement Part No. with required radius (R). Example: E26.07.150.0

Ba: pin dimension approx. 0,3 - 0,5 mm wider.

Dimensions

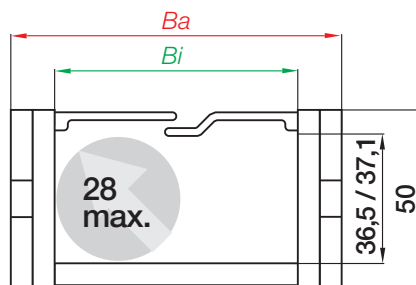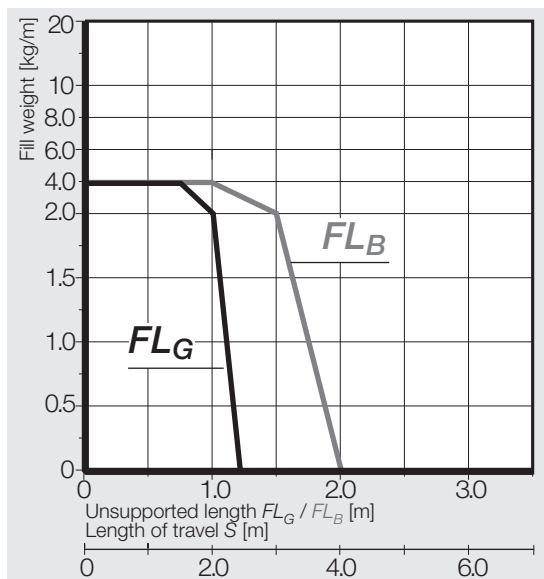

Inner height
1-chamber 36,5 mm
2/3-chamber 37,1 mm
Pitch 56 mm/link
Links/m 18 (1008 mm)
Chain length $S/2 + K$

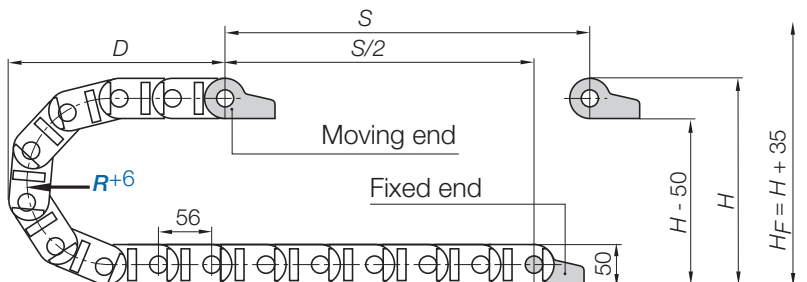


R	063	075	100	125	150	175	200	250
H +5	176	200	250	300	350	400	450	550
D	172	184	209	234	259	284	309	359
K	310	350	430	505	585	665	745	900

The required clearance height: $H_F = H + 35$ mm (with 2,0 kg/m fill weight)




Mounting brackets, polymer | pivoting | locking

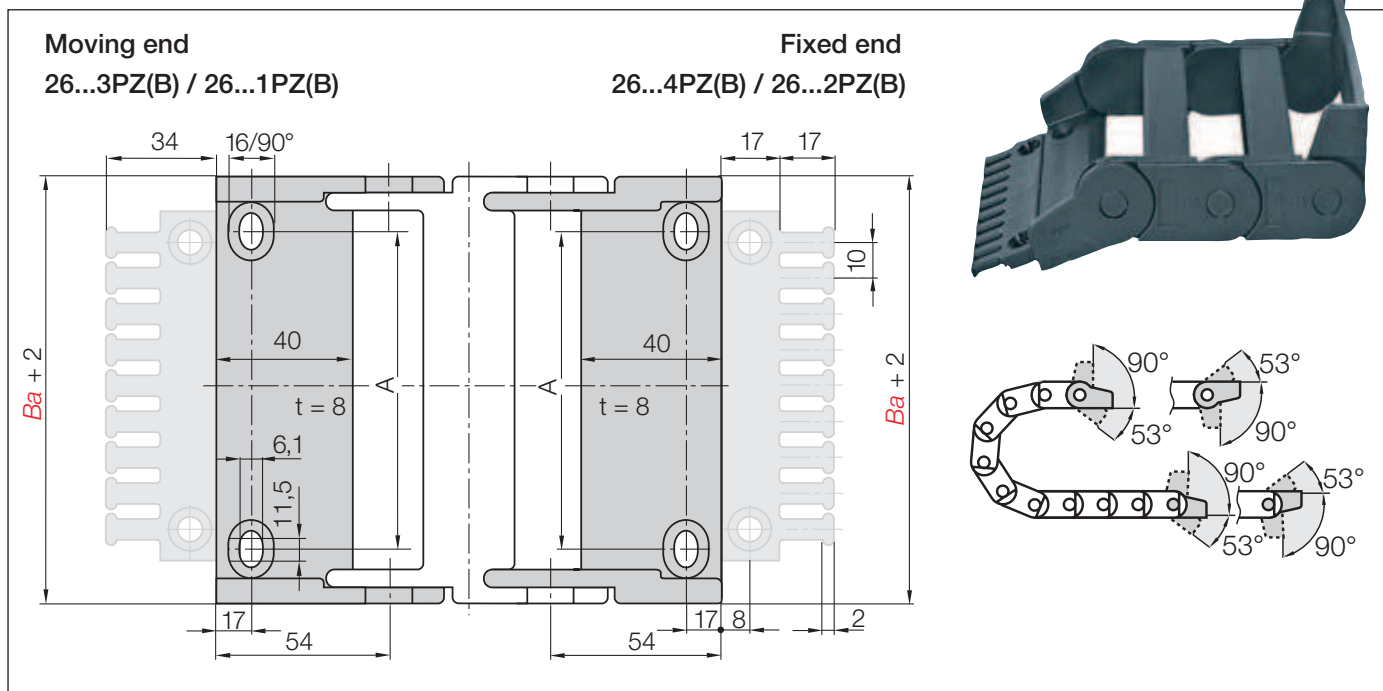

Width Index	Standard	Part No. full set pivoting:		Part No. full set locking:		Dim. A [mm]	Number of teeth
		with tie-wrap plates	without tie-wrap plates	with tie-wrap plates	without tie-wrap plates		
07.	▶	2607.34PZB	2607.34PZ	2607.12PZB	2607.12PZ	55	7
2/45.	▶	2610.34PZB	2610.34PZ	2610.12PZB	2610.12PZ	80	10
3/45.	▶	2615.34PZB	2615.34PZ	2615.12PZB	2615.12PZ	130	15

Material mounting bracket - igumid G, temperature: -40° up to +120° C, VDE 0304 IIC UL94-HB

Full set with tie-wrap plate + 10 cable tie-wraps, please add index **K1** ▶ e.g. 2607.34PZBK1

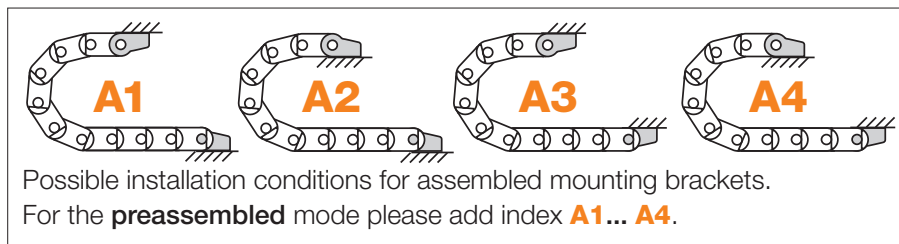

Part No. structure

2607. 34 PZB A2 A... must be indicated on preassembled configurations

With strain relief tie-wrap plates

Full set pivoting

Mounting bracket for selected width index