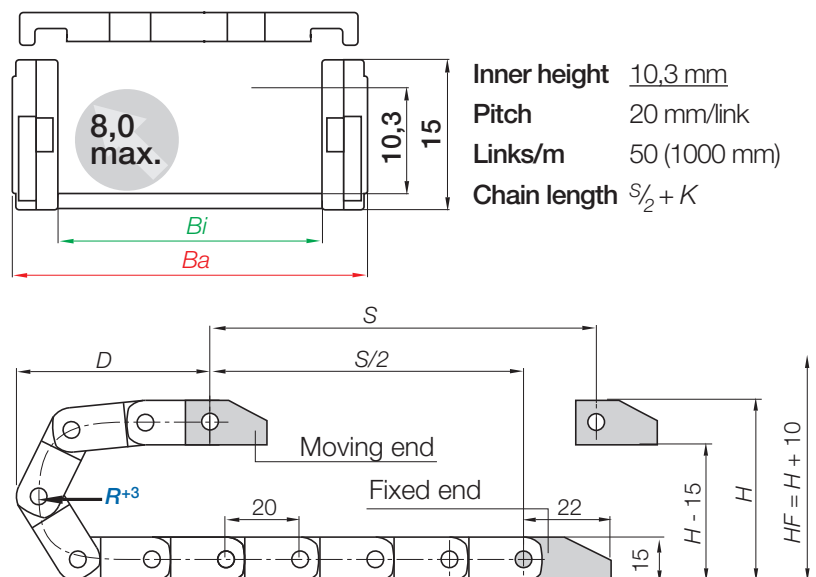
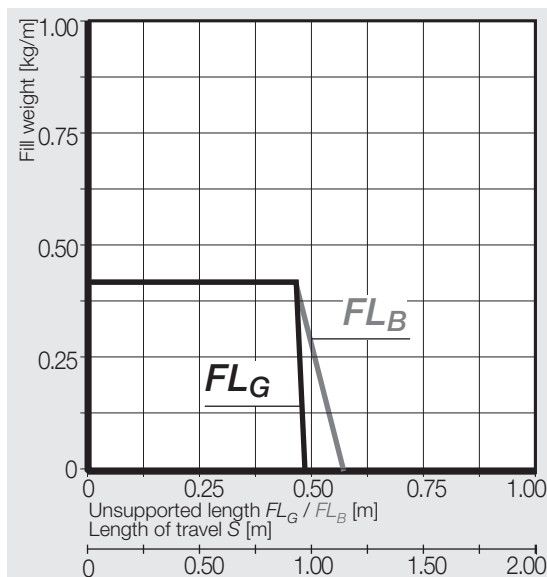



e-tube | Series R07 | Zip-open along outer radius

e-tube zip-open along outer radius	<i>Bi</i> [mm]	<i>Ba</i> [mm]	<i>R</i> Bending radii [mm]	Weight [kg/m]
R07. 06 .R.0*	06	12,5	038 048	≈ 0,15
R07. 10 .R.0	10	16,5	038 048	≈ 0,16
R07. 16 .R.0	16	22,5	038 048	≈ 0,18
R07. 20 .R.0	20	27	038 048	≈ 0,19
R07. 30 .R.0	30	37	038 048	≈ 0,22
R07. 40 .R.0	40	47	038 048	≈ 0,25
R07. 50 .R.0	50	57	038 048	≈ 0,28
R07. 64 .R.0*	64	71	038 048	≈ 0,32


Supplement Part No. with required radius (*R*). Example: **R07.40.038.0** *Width available upon request, please consult igus® for delivery time

Dimensions


<i>R</i>	038	048
<i>H</i>	91	111
<i>D</i>	76	86
<i>K</i>	160	195

The required clearance height: $H_F = H + 10$ mm (with 0,2 kg/m fill weight)


Mounting brackets, polymer one-piece | locking | More features ► www.igus.eu/R07

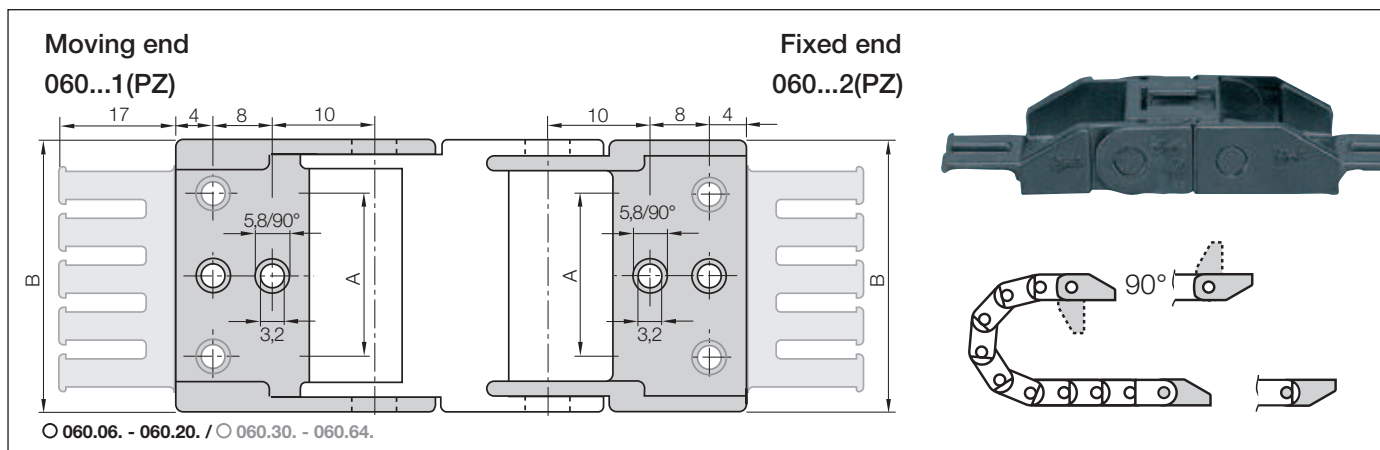

Width Index	Standard	Part No. full set with tie-wrap plates	Part No. full set without tie-wrap plates	Dim. A [mm]	Dim. B [mm]	Number of teeth
06.*	►	060.06. 12PZ	060.06. 12	-	12,5	1
10.	►	060.10. 12PZ	060.10. 12	-	16,5	1
16.	►	060.16. 12PZ	060.16. 12	-	22,5	2
20.	►	060.20. 12PZ	060.20. 12	-	27,0	2
30.	►	060.30. 12PZ	060.30. 12	22	37,0	3
40.	►	060.40. 12PZ	060.40. 12	32	47,0	4
50.	►	060.50. 12PZ	060.50. 12	42	57,0	5
64.*	►	060.64. 12PZ	060.64. 12	56	71,0	6

○ Drilling pattern for width index: 060.06. - 060.20. center bores only / ○ 060.30. - 060.64. outer bores only (see figure above)

*Width available upon request, please consult igus® for delivery time

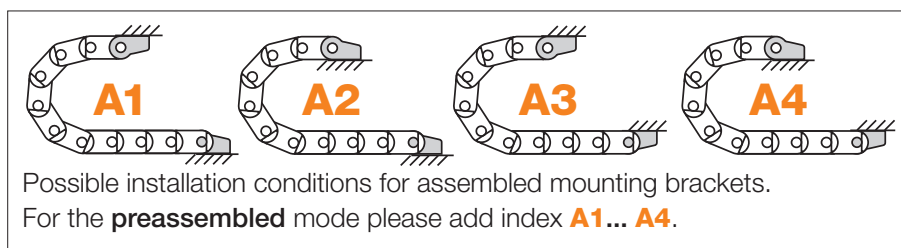

Part No. structure

