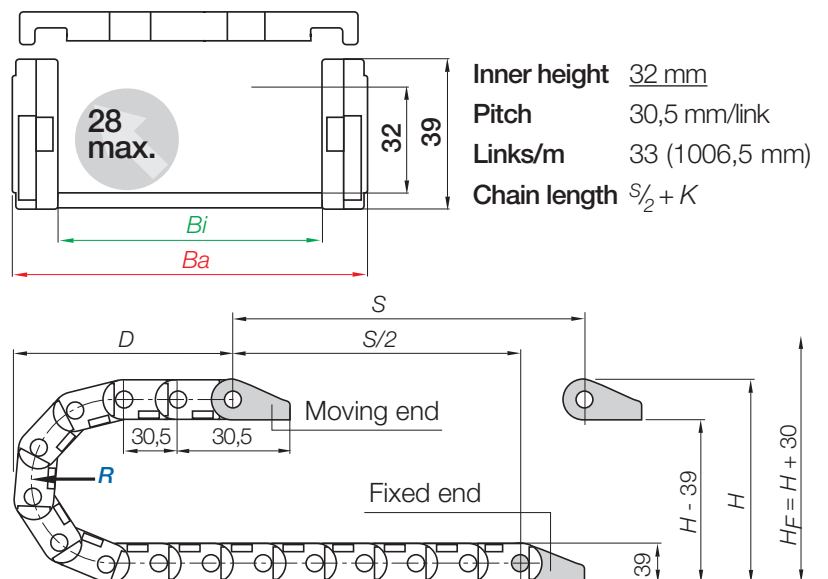
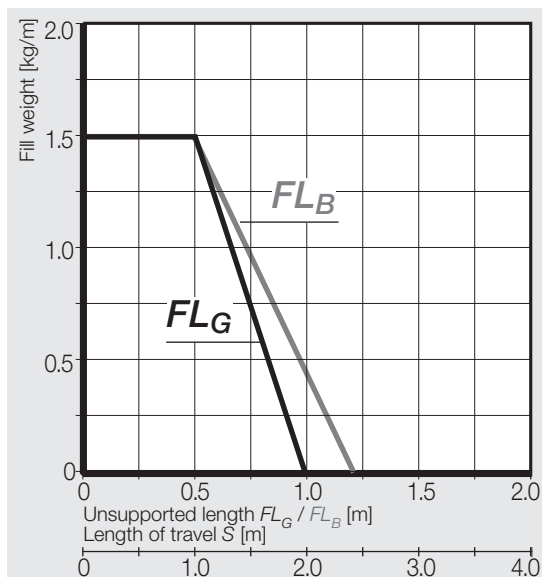

e-tube | Series R17 | Zip-open along outer radius


| e-tube zip-open along outer radius | <i>Bi</i> [mm] | <i>Ba</i> [mm] | <i>R</i> Bending radii [mm] | Weight [kg/m] |
|------------------------------------|-------------------|-------------------|--------------------------------|------------------|
| R17. 015 .R.0 | 15 | 26 | 063 075 100 125 | ≈ 0,57 |
| R17. 025 .R.0 | 25 | 36 | 063 075 100 125 | ≈ 0,64 |
| R17. 063 .R.0 | 63 | 74 | 063 075 100 125 | ≈ 0,88 |

 Supplement Part No. with required radius (*R*). Example: **R17.015.063.0**
Dimensions


| <i>R</i> | 063 | 075 | 100 | 125 |
|----------|------------|------------|------------|------------|
| <i>H</i> | 165 | 189 | 239 | 289 |
| <i>D</i> | 128 | 140 | 165 | 190 |
| <i>K</i> | 260 | 300 | 380 | 455 |


 The required clearance height: $H_F = H + 30$ mm (with 1,0 kg/m fill weight)

Mounting brackets, polymer one-piece | locking

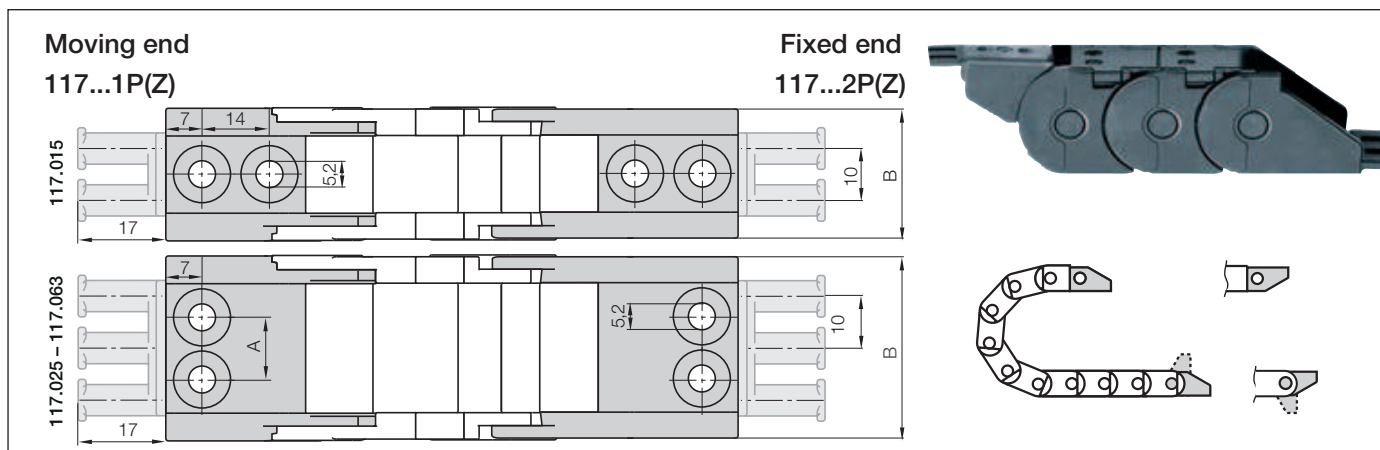

| Width Index | Standard | Part No. full set with tie-wrap plates | Part No. full set without tie-wrap plates | Dim. A [mm] | Dim. B [mm] | Number of teeth |
|-------------|----------|--|---|-------------|-------------|-----------------|
| 015. | ▶ | 117.015.12PZ | 117.015.12P | – | 25,7 | 2 |
| 025. | ▶ | 117.025.12PZ | 117.025.12P | 12 | 35,7 | 3 |
| 063. | ▶ | 117.063.12PZ | 117.063.12P | 48 | 73,7 | 6 |

Drilling pattern for width index: **117.015.** center bores only / **117.025. -117.7.** outer bores only (see figure above)

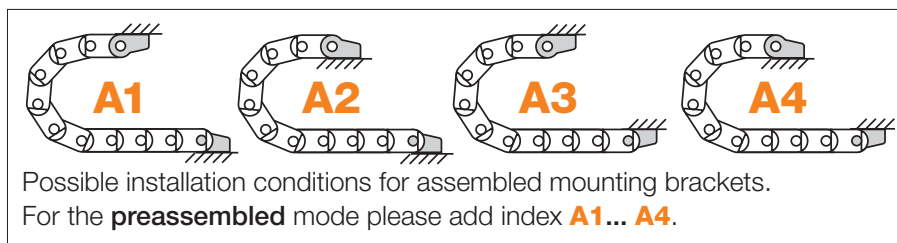

Part No. structure

| | |
|--------------------------|---|
| 117.015. 12 PZ A1 | A... must be indicated on preassembled configurations |
| | With strain relief tie-wrap plates |
| | Full set locking |
| | Mounting bracket for selected width index |

Interior separation

1,5

8

Slotted separator for e-tubes

unassembled **R171**

assembled **R172**

Slotted separator R171

Is used when vertical separation is required. Due to its slot, it allows basic vertical/horizontal shelving arrangements.

2

X

Full-width shelf for e-chains®

unassembled **110.X**

assembled **111.X**

Full-width shelf 110.X

This option makes sense in applications with many thin cables with similar diameters. For a consequent subdivision. Full-width shelves can be arranged at 5 different heights (in 5 mm increments).

| Width X [mm] | unassembled | assembled | Width X [mm] | unassembled | assembled |
|--------------|-------------|-----------|--------------|-------------|-----------|
| 015 | 110.15 | 111.15 | 063 | 110.63 | 111.63 |
| 025 | 110.25 | 111.25 | | | |