


> LTF44

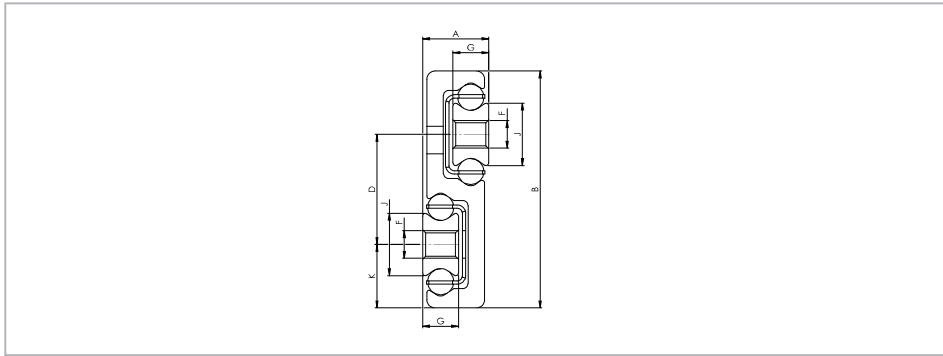


All dimensions are indicated in mm

Fig. 56

Type	Size	A	B	J	G	K	D	F	Weight per single guide [kg/m]
LTF44	44	12	43	11,3	6,5	11,5	20	M5	2,7

Tab. 35

> HGS060

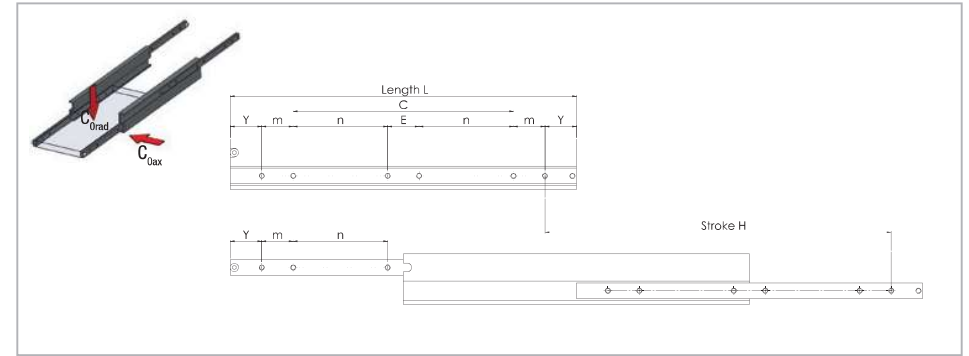

All dimensions are indicated in mm

Fig. 57

Type	Size	Length L [mm]	Stroke H [mm]	Load capacity per pair C_{rad} [N]	Y	m	n	E	C	Number of holes
HGS	60	250	250	1000	50	50			50	4
		300	300	1250					100	
		350	350	1350					150	
		400	400	1400					200	
		450	450	1400					250	
		500	500	1400					300	
	550	550	1350	150	50	-	6			
	600	600	1300	175						
	650	650	1250	200						
	700	700	1200	225						
	750	750	1150	250						
	800	800	1050	275						
	850	850	950	300	50	-	6			
	900	900	850	325						
	950	950	750	350						
	1000	1000	650	375						

The load capacity for aluminum is 40% and for stainless steel 60% of the stated values, if available in this material variant (see Technical features overview).

Tab. 36