

## drylin® linear technology – drylin® W profile guides

Modular linear guides

Replaceable lubrication-free drylin® liners

Robust linear housings

Ready-to-install linear carriages

Single and double rails



Superior operating properties by combining iglidur® bearing elements and anodised rails with round shaft profiles

Corrosion-resistant with hard-anodised running surface

Quiet operation

Clean as no lubrication required

Lightweight due to the use of plastics and aluminium

Smooth operation with sliding elements made from lubrication-free iglidur® high-performance polymers

Maintenance-free due to integrated lubricants

Profiles with various geometric designs, installation sizes and clearances

## Lubrication-free linear system – drylin® W

drylin® W profile guides are a cost-effective pre-assembled system. The design allows extremely high flexibility in the construction and installation due to the use of individual or double rails. Hard-anodised aluminium is used as rail material and provides the best friction and wear results. The absence of lubrication makes the profile guide system extremely insensitive to dirt and, due to its cleanliness, it is also suitable for applications in clean and hygienic environments.

- Easy installation, maintenance-free
- Resistant to dirt thanks to dry operation
- Lightweight and quiet
- Square rail with floating bearing function for 90° installation
- Bearing with manual clearance adjustment available

### Typical application areas

- Agricultural machinery
- Automotive
- Medical technology
- Packaging industry
- Furniture

### Available from stock

Detailed information about delivery time online.

### Price breaks online

No minimum order value. No minimum order quantity.

max. +200°C  
Min. -40°C

Carriage lengths: 60-250mm  
Carriage widths: 54-195mm  
Rail length: up to 4,000mm

### Service life calculation

► [www.igus.eu/drylin-expert](http://www.igus.eu/drylin-expert)



### Single components: single and double rails

- Material: aluminium, hard-anodised
  - Design freedom
  - 316 stainless steel rails
- From page 920



### Individual components: Pillow blocks

- Material: Zinc die-casting, aluminium or stainless steel
  - Round or square design
  - Liners made from iglidur® high-performance polymers
- From page 921



### Assembled systems: Complete carriages

- Pre-assembled
  - Variable lengths and widths
  - Mono-slide carriage made from aluminium
- From page 934



### Accessories

- Manual clamp for single bearing housing and complete carriages
  - End caps for high profile rails
- From page 962



### Hybrid guides

- Linear housing with integrated single or double roller
  - Low drive force
  - Available as single housing or complete carriage
- From page 949

### Based on drylin® W



Measuring systems  
► From page 1135



Linear modules  
SLW/SAW/GRW/ZLW  
► From page 1307



drylin® linear bearings enable precise positioning at high speeds. Unlike conventional bearings, they do not require lubrication and are corrosion free.



Lightweight due to the use of plastic and aluminium with a corrosion-free coating, the guides in the drylin® range impress with their quiet and precise running.



Adjustment mechanisms on gym equipment no longer have to be maintained thanks to the igus® drylin® W profile guides.




The closing mechanism on this casting machine is subjected to high temperatures and dirt. To make it as durable as possible despite this, it is mounted with a drylin® W profile guide.



Due to the price advantage coupled with the resistance against dirt and dust, the customer opted for drylin® W guides.



Quiet, low vibration adjustments in the stage equipment field are enabled through the use of drylin® W linear guides based on steel shafts in combination with stainless steel pillow blocks.

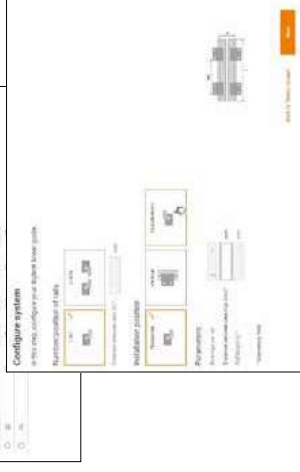

**Expert for linear guides: System selection and service life calculation with CAD**  
Configure and calculate the service life of linear bearings – constantly expanded by new sizes and products

Easily calculate the service life of your required linear guide and configure with a few clicks. Select a drylin® system and add the relevant environmental parameters. Select the bearing size, carriage, number and position. Then enter the distance between the rails and the mounting. Define more relevant parameter of the guidance and select a rail length. The results are displayed.



► [www.igus.eu/drylin-expert](http://www.igus.eu/drylin-expert)



Download the online tool app now

Download on the App Store



**drylin® CAD configurator: Generate complete 3D models for drylin® linear technology according to your specifications**

The igus® CAD online configurator gives you the ability to design and save your linear guide as a system, individual components directly as a 3D model in all commonly used formats, or to have these sent by e-mail – free of charge and without registration.



► [www.igus.eu/drylin-CAD](http://www.igus.eu/drylin-CAD)

**More information about the products can be found in the igus® download area**

- Assembly instructions
- Assembly videos
- System design
- Catalogues



► [www.igus.eu/downloads](http://www.igus.eu/downloads)

Profiles	Installation size						Liners material				
	06	10	16	20	25		J	J200	X	A1.80	E7
Single rail, round	●	●	●	●	●		●	●	●	●	●
Single rail, square	●	●	●	●	●		●	●	●	●	●
Double rail, round	●	●	●	●	●		●	●	●	●	●
Double rail, square	●	●	●	●	●		●	●	●	●	●
High profile, round	●	●	●	●	●		●	●	●	●	●
High profile, square	●	●	●	●	●		●	●	●	●	●
Stainless steel	●	●	●	●	●		●	●	●	●	●
Carbon fibre/fibreglass	●	●	●	●	●		●	●	●	●	●
Curved rail	●	●	●	●	●		●	●	●	●	●
<b>Bearing housing – material</b>											
Zinc die-cast	●	●	●	●	●		●	●	●	●	●
Aluminium	●	●	●	●	●		●	●	●	●	●
Stainless steel	●	●	●	●	●		●	●	●	●	●
<b>Bearing housing – options</b>											
With manual clamp	●	●	●	●	●		●	●	●	●	●
Clearance adjustment	●	●	●	●	●		●	●	●	●	●
Hybrid roller bearing	●	●	●	●	●		●	●	●	●	●
Pre-load	●	●	●	●	●		●	●	●	●	●
Bearing can be changed on the rail	●	●	●	●	●		●	●	●	●	●
<b>Linear guides</b>											
Pre-assembled carriages	●	●	●	●	●		●	●	●	●	●
Hybrid carriages	●	●	●	●	●		●	●	●	●	●
Mono-slide carriage	●	●	●	●	●		●	●	●	●	●
<b>Systems</b>											
Lead screw modules	●	●	●	●	●		●	●	●	●	●
Toothed belt axis	●	●	●	●	●		●	●	●	●	●
With measuring system	●	●	●	●	●		●	●	●	●	●

● Standard  
● Optional




Floating bearings for all directions (up to ±1mm) compensate misalignments and parallelism errors.


**Floating bearings aid assembly – when using single rails**


Assembly is easy with the drylin® WQ square profile. Floating bearings for all directions (±1mm) compensate misalignments and parallelism errors between rails. This eliminates jamming, otherwise only prevented by time-consuming manual alignment of the system. Although drylin® W is a profile rail system, it is able to compensate angular errors about the x-axis. An angular adjustment of ±7° is possible here. This effectively eliminates the misalignment known to occur when assembling to sheet metal fabrications.

**Possible combinations in assembled rail systems**

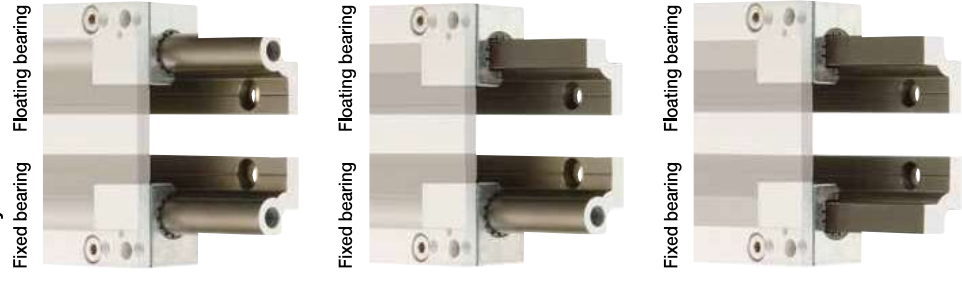

**Available floating bearing blocks**

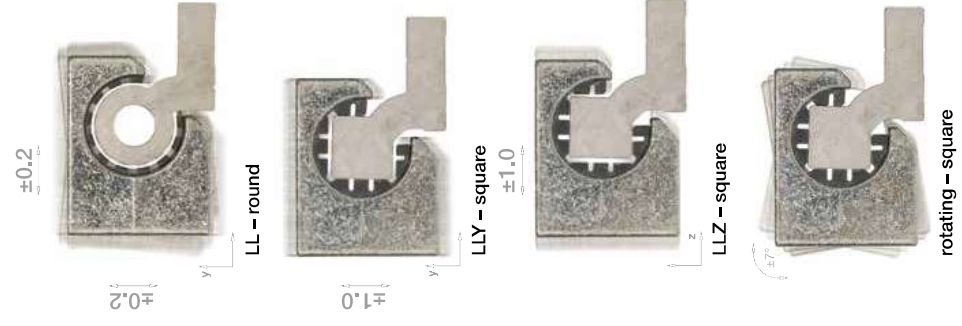

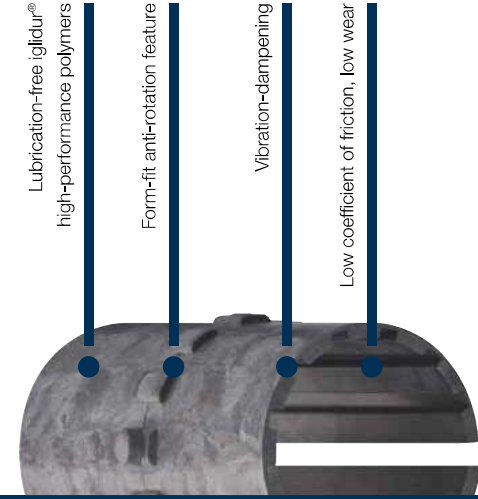

Lubrication-free iglidur® high-performance polymers

Form-fit anti-rotation feature

Vibration-dampening

Low coefficient of friction, low wear

Corrosion-free

Form-fit locating spigot

Resistant to dirt

Integrated flute design for dirt to pass through

Open geometric design for rapid assembly

## drylin® liners made from high-performance polymers

Extremely wear-resistant tribopolymers improved by precisely blended additions of strengthening materials and solid lubricants, tested a thousand times and proved a million times – that is iglidur®. Further to the general properties, every iglidur® bearing material has a series of special features, which account for its particular suitability for certain applications and requirements. The detailed description of the materials can be found in the respective sections.


- Lubrication-free
- Corrosion-free
- Low coefficient of friction
- Maintenance-free
- Dirt resistance
- Lightweight
- High wear resistance
- Excellent price-performance ratio

	The All-rounder – iglidur® J	The specialist – iglidur® J200	The extreme – iglidur® X	The endurance runner – iglidur® E7	The FDA-compliant – iglidur® A180	Blue Sky Thinking FDA/EU-compliant – iglidur® A180
Application temperature	from -50°C to +80°C	from -50°C to +80°C	from -100°C to +250°C	from -50°C to +70°C	from -50°C to +90°C	from -50°C to +90°C
Best coefficient of friction with	Steel shaft	Hard-anodised aluminium	Hard-chromed steel	Steel/stainless steel shaft	Stainless steel shaft	Hardened stainless steel shafts
Volume resistance	> 10 <sup>10</sup> Qcm	> 10 <sup>10</sup> Qcm	< 10 <sup>9</sup> Qcm	> 10 <sup>10</sup> Qcm	> 10 <sup>10</sup> Qcm	> 10 <sup>10</sup> Qcm
Moisture absorption	1.3% weight	0.7% weight	0.5% weight	< 0.1% weight	0.2% weight	< 0.1% weight
Maximum service life with	Hard-anodised aluminium	Hard-anodised aluminium	Hardened stainless steel	Steel/stainless steel shaft	Stainless steel shaft	Hardened stainless steel shafts
Potential counter partner	All shaft materials	Hard-anodised aluminium	Hardened stainless steel	Steel/stainless steel shaft	All shaft materials	Stainless steel
Permissible stat. surface pressure	35MPa	23MPa	150MPa	18MPa	28MPa	15MPa
Part No.	JUM-...	J200UM-...	XUM-...	E7UM-...	A180UM-...	A180UM-...

Available pillow blocks and carriages

	igidur® J200	igidur® J	igidur® X	igidur® E7	igidur® A180
Pillow block, square	●	●	●	●	●
Standard	●	●	●	●	●
Aluminium	●	●	●	●	●
Pillow block, round	●	●	●	●	●
Standard	●	●	●	●	●
Stainless steel	●	●	●	●	●
Aluminium	●	●	●	●	●
Aluminium, tandem	●	●	●	●	●
"Turn-to-fit"	●	●	●	●	●
Spring pre-load	●	●	●	●	●
Bearing can be changed on the rail	●	●	●	●	●
Hybrid – roll and slide	●	●	●	●	●
Guide carriage, fitted	●	●	●	●	●
Standard, assembled, square	●	●	●	●	●
Standard, assembled, round	●	●	●	●	●
Hybrid, round	●	●	●	●	●
"Turn-to-fit", round	●	●	●	●	●
Complete carriages	●	●	●	●	●
Mono-slide, square	●	●	●	●	●
	● Standard	● Standard	● Standard	● Standard	● Standard
	● Optional	● Optional	● Optional	● Optional	● Optional

Single rail, square, hard-anodised aluminium

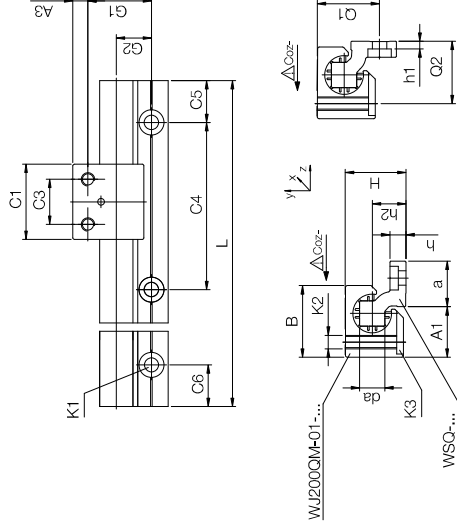
**Hard-anodised surfaces**  
 ▶ Page 902


**Curved rail profiles**  
 ▶ Page 906

**Technical data and dimensions [mm]**

Part No.	Weight [kg/m]	H <sup>57)</sup> ±0.25	da	L	C5 Max.	C6 Min.	C6 Max.	K1 for screw	h	a	h1	h2	G1	G2	A1	Q1	Q2	Moment of resistance					
																		I <sub>y</sub>	I <sub>z</sub>	W <sub>by</sub>	W <sub>bz</sub>	W <sub>by</sub>	W <sub>bz</sub>
																		DIN 912	M4 <sup>59)</sup>	M6 <sup>59)</sup>	M8	M8	M10
WSQ-06	0.23	14	5	3,000	14	4	4 <sup>58)</sup>	7.5	18	10.5	13.5	17	15										
WSQ-10	0.54	20	7.5	4,000	25	5.5	5.5 <sup>58)</sup>	11	27	17	18.5	26	21										
WSQ-16	0.94	27	11.5	4,000	27	7.5	3.5	14	33	19	25	32	28										
WSQ-20	1.41	36	15	4,000	27	9.5	4.5	20	38	21	30	37	37										
WSQ-25	1.94	45	18.5	4,000	32	11.5	5.5	25	46.5	25.5	37.5	45.5	46										

Part No.	C4	C5 Min.	C5 Max.	C6 Min.	C6 Max.	K1 for screw	h	a	h1	h2	G1	G2	A1	Q1	Q2	Moment of resistance							
																I <sub>y</sub>	I <sub>z</sub>	W <sub>by</sub>	W <sub>bz</sub>	W <sub>by</sub>	W <sub>bz</sub>		
																		DIN 912	M4 <sup>59)</sup>	M6 <sup>59)</sup>	M8	M8	M10
WSQ-06	60	20	49.5	20	49.5	2,200	640	220	100														
WSQ-10	120	20	79.5	20	79.5	16,100	3,300	950	350														
WSQ-16	120	20	79.5	20	79.5	33,000	10,800	1,700	910														
WSQ-20	120	20	79.5	20	79.5	56,500	34,000	2,600	2,100														
WSQ-25	150	25	99.5	25	99.5	115,900	73,500	4,500	3,700														

Standard hole pattern: C5 = C6, please order with drawing for C5 ≠ C6

<sup>57)</sup> Height dimension minus the bearing clearance tolerance<sup>58)</sup> Plain holes

Can be combined with:



WJ200QM-...

Pillow blocks, square, made from zinc die-casting or aluminium



Can be combined with:



WSQ-...



WJ200QM-...



WSX-...

**Technical data and dimensions [mm]**

Part No.	Floating bearing clearance [g]	Floating bearing direction	Weight [g]	B	C1	C3	A3	K2	K3	Static load capacity					
										Coz+	Coz-	Coz			
													[N]	[N]	[N]
WJ200QM-01-06	-	-	16	8	18	19	10	4.5	M4	M3	420	420	140		
WJ200QM-01-06-AL	-	-	16	8	18	19	10	4.5	M4	M3	420	420	140		
WJ200QM-01-06-LLY	± 0.5	y/z	16	8	18	19	10	4.5	M4	M3	420	420	140		
WJ200QM-01-06-LLZ	± 0.5	y/z	16	8	18	19	10	4.5	M4	M3	420	420	140		
WJ200QM-01-10	-	-	41	21	26	29	16	6.5	M6	M5	1,200	1,200	250		
WJ200QM-01-10-AL	-	-	41	21	26	29	16	6.5	M6	M5	1,200	1,200	250		
WJ200QM-01-10-LLY	± 0.7	y/z	41	21	26	29	16	6.5	M6	M5	1,200	1,200	250		
WJ200QM-01-10-LLZ	± 0.7	y/z	41	21	26	29	16	6.5	M6	M5	1,200	1,200	250		
WJ200QM-01-16	-	-	100	51	34.5	36	18	9	M8	M6	2,100	2,100	400		
WJ200QM-01-16-AL	-	-	100	51	34.5	36	18	9	M8	M6	2,100	2,100	400		
WJ200QM-01-16-LLY	± 1.0	y/z	100	51	34.5	36	18	9	M8	M6	2,100	2,100	400		
WJ200QM-01-16-LLZ	± 1.0	y/z	100	51	34.5	36	18	9	M8	M6	2,100	2,100	400		
WJ200QM-01-20	-	-	190	104	42.5	45	27	9	M8	M6	3,200	3,200	500		
WJ200QM-01-20-AL	-	-	190	104	42.5	45	27	9	M8	M6	3,200	3,200	500		
WJ200QM-01-20-LLY	± 1.0	y/z	190	104	42.5	45	27	9	M8	M6	3,200	3,200	500		
WJ200QM-01-20-LLZ	± 1.0	y/z	190	104	42.5	45	27	9	M8	M6	3,200	3,200	500		
WJ200QM-01-25	-	-	435	212	52.5	58	36	11	M10	M8	4,800	4,800	950		
WJ200QM-01-25-AL	-	-	435	212	52.5	58	36	11	M10	M8	4,800	4,800	950		
WJ200QM-01-25-LLY	± 1.0	y/z	435	212	52.5	58	36	11	M10	M8	4,800	4,800	950		
WJ200QM-01-25-LLZ	± 1.0	y/z	435	212	52.5	58	36	11	M10	M8	4,800	4,800	950		



Order example: WJ200QM-01-06: Pillow block, square

WJ200QM-01-06-LLZ: Pillow block, square, with floating bearing in z-direction

WJ200QM-01-06-AL: Pillow block, square, made from aluminium



Order key – single rail



Order key – pillow block

Type

Length

Type

Size

Options

**WSQ-06-3000**

Guide rails	Square	Shafts Ø	Rail length [mm]
-------------	--------	----------	------------------

**WJ200QM-01-10-LLY**

drylin® W	Linear material iglidur® J200	Pillow block, square	Standard	Size	Floating bearing in y-direction
-----------	-------------------------------	----------------------	----------	------	---------------------------------

Options:

LLY: Floating bearing in y-direction

LLZ: Floating bearing in z-direction

AL: Pillow block made from aluminium

# drylin® W profile guides | Product range

Single rail, round, hard-anodised aluminium



WS-10





WS-16



WS-20



WS-25

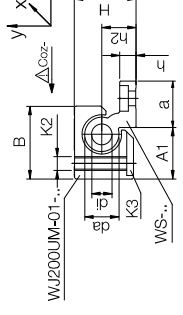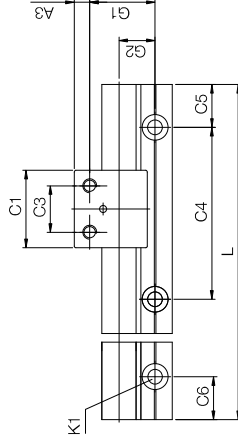

This assembled position  
is not possible for WS-10



Hard-anodised surfaces

► Page 902

Stainless steel version available

► Page 1158



Curved rail profiles

► Page 906

## Technical data and dimensions [mm]

Part No.	Weight	H <sup>57)</sup>	da	di	L	a	h	h1	h2	G1	G2	A1	Q1	Q2
	[kg/m]	±0,25	-0,1	Max.										
WS-10	0,62	18	10	-	4,000	27	5,5	5,5 <sup>58)</sup>	9	27	17	16,5	-	-
WS-16	0,98	27	16	8,0	4,000	27	7,5	3,5	14	33	19	25	32	28
WS-20	1,32	36	20	10,2	4,000	27	9,5	4,5	20	38	21	30	37	37
WS-25	2,03	45	25	14	4,000	32	11,5	5,5	25	46,5	25,5	37,5	45,5	46

Part No.	C1	C3	C4	C5	C6	Min.	Max.	A3	K1 for screw	Geometrical moment of inertia			Moment of resistance	
										I <sub>y</sub>	I <sub>z</sub>	I <sub>yz</sub>	W <sub>by</sub>	W <sub>bz</sub>
									DIN 912	[mm <sup>4</sup> ]	[mm <sup>4</sup> ]	[mm <sup>4</sup> ]	[mm <sup>3</sup> ]	[mm <sup>3</sup> ]
WS-10	29	16	120	20	79,5	20	79,5	6,5	M6 <sup>59)</sup>	19,000	2,850	1,000	310	310
WS-16	36	18	120	20	79,5	20	79,5	9	M8	36,000	12,900	1,800	940	940
WS-20	45	27	120	20	79,5	20	79,5	9	M8	57,100	35,000	2,700	1,900	1,900
WS-25	58	36	150	25	99,5	25	99,5	11	M10	129,000	86,000	4,900	3,800	3,800

Standard hole pattern: C5 = C6, please order with drawing for C5 ≠ C6

<sup>57)</sup> Height dimension minus the bearing clearance tolerance

<sup>58)</sup> Plain holes

Can be combined with:





WJ200UM(T)--- WJ200UME--- WJUM---ES-FG WJRM---

922 Online tools and more information ► [www.igus.eu/drylinW](http://www.igus.eu/drylinW)



# drylin® W profile guides | Product range

Single rails round, made of 316 stainless steel

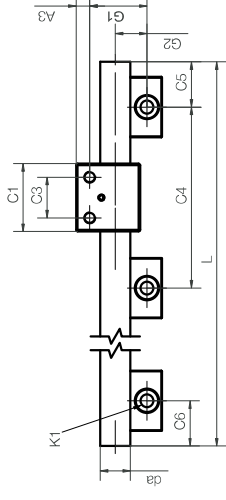

This assembled position  
is not possible for WS-10



Housing and shaft support material

AISI 316

AISI 316Ti

Shaft material

Installation size 25

Shaft, shaft support and housing material

AISI 316Ti

## Technical data and dimensions [mm]

Part No.	Weight	H <sup>57)</sup>	da	di	L	a	h	h1	h2	G1	G2	A1	Q1	Q2
	[kg/m]	±0,25	-0,1	Max.										
WS-10-ES-FG	0,87	18	10	3,000	27	5,5	5,5 <sup>58)</sup>	9	27	17	16,5	-	-	-
WS-16-ES-FG	2,22	27	16	3,000	27	12,0	4,5	14	33	19	25	32	28	28
WS-20-ES-FG	3,37	36	20	3,000	27	16,0	8,0	20	38	21	30	37	37	37
WS-25-ES-FG	5,21	45	25	3,000	32	20,0	9,0	25	46,5	25,5	37,5	45,5	45,5	46

Part No.	C1	C3	C4	C5	C6	Min.	Max.	A3	K1 for screw	Geometrical moment of inertia			Moment of resistance	
										I <sub>y</sub>	I <sub>z</sub>	I <sub>yz</sub>	W <sub>by</sub>	W <sub>bz</sub>
									DIN 912	[mm <sup>4</sup> ]	[mm <sup>4</sup> ]	[mm <sup>4</sup> ]	[mm <sup>3</sup> ]	[mm <sup>3</sup> ]
WS-10-ES-FG	29	16	120	20	79,5	20	79,5	6,5	M6 <sup>59)</sup>	491	491	98	98	98
WS-16-ES-FG	36	18	120	20	79,5	20	79,5	9,0	M8	3,217	3,217	402	402	402
WS-20-ES-FG	45	27	120	20	79,5	20	79,5	9,0	M8	7,854	7,854	785	785	785
WS-25-ES-FG	58	36	150	25	99,5	25	99,5	11,0	M10	19,175	19,175	1,534	1,534	1,534

<sup>57)</sup> Height dimension minus the bearing clearance tolerance

<sup>58)</sup> Plain holes

Can be combined with:



WJ200UM(T)--- WJ200UME--- WJUM---ES-FG WJRM---

3D CAD files, prices and delivery time online ► [www.igus.eu/drylinW](http://www.igus.eu/drylinW)






## drylin® W profile guides | Product range



Pillow blocks, round, adjustable bearing clearance



Picture shows  
WJ200UME-01-10



Allen key supplied

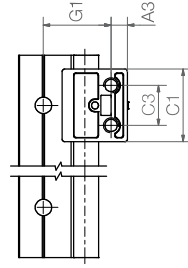

### Technical data and dimensions [mm]

Part No.	Weight		B		C1		C3		A3		K2		H		SW		G1		Static load capacity		
	[g]	[N]	[g]	[N]	[g]	[N]	[g]	[N]	[g]	[N]	[g]	[N]	[g]	[N]	[g]	[N]	[g]	[N]	[N]	[N]	
WJ200UME-01-10	43	26	29	16	6.5	M6	18	1.5	27	560	560	250	250	250	250	250	250	250	250	250	250
WXJ200UME-01-10	43	26	29	16	6.5	M6	18	1.5	27	560	560	250	250	250	250	250	250	250	250	250	250
WJ200UME-01-10-AL	19	26	29	16	6.5	M6	18	1.5	27	560	560	250	250	250	250	250	250	250	250	250	250
WJ200UME-01-10-ES	56	26	29	16	6.5	M6	18	1.5	27	560	560	250	250	250	250	250	250	250	250	250	250
WJ200UME-01-16	110	34.5	36	18	9	M8	27	2.5	33	980	980	400	400	400	400	400	400	400	400	400	400
WJ200UME-01-16-AL	45	34.5	36	18	9	M8	27	2.5	33	980	980	400	400	400	400	400	400	400	400	400	400
WJ200UME-01-16-ES	132	34.5	36	18	9	M8	27	2.5	33	980	980	400	400	400	400	400	400	400	400	400	400
WJ200UME-01-20	222	42.5	45	27	9	M8	36	2.5	38	1,500	1,500	500	500	500	500	500	500	500	500	500	500
WJ200UME-01-20-AL	95	42.5	45	27	9	M8	36	2.5	38	1,500	1,500	500	500	500	500	500	500	500	500	500	500
WJ200UME-01-20-ES	275	42.5	45	27	9	M8	36	2.5	38	1,500	1,500	500	500	500	500	500	500	500	500	500	500
WJ200UME-01-25*	431	52.5	58	36	11	M10	45	2.5	46.5	2,250	2,250	950	950	950	950	950	950	950	950	950	950
WJ200UME-01-25-AL*	194	52.5	58	36	11	M10	45	2.5	46.5	2,250	2,250	950	950	950	950	950	950	950	950	950	950
WJ200UME-01-25-ES*	539	52.5	58	36	11	M10	45	2.5	46.5	2,250	2,250	950	950	950	950	950	950	950	950	950	950

Can be combined with:



Suitable liner material:



## drylin® W profile guides | Product range




Pillow blocks, round, with spring pre-load



Order key

Type	Size	Material
drylin® W	Standard	Pre-load
Liner material iglidur® J200	Pillow block, round	Housing material
WJ200UM-01-16-□-P40	Size	

Blank =  
Zinc die-casting  
AL =  
Aluminium  
ES =  
Stainless steel  
(AISI 316Ti, machined)

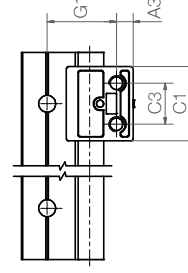

### Technical data and dimensions [mm]

Part No.	Pre-load		Weight		B		C1		C3		A3		K2		H		SW		G1	
	[N]	[g]	[g]	[N]	[g]	[N]	[g]	[N]	[g]	[N]	[g]	[N]	[g]	[N]	[g]	[N]	[g]	[N]	[g]	[N]
WJ200UM-01-10-□-P40	4	43	56	19	26	29	16	6.5	M6	18	1.5	27	560	560	250	250	250	250	250	250
WJ200UM-01-10-□-P90	9	43	56	19	26	29	16	6.5	M6	18	1.5	27	560	560	250	250	250	250	250	250
WJ200UM-01-10-□-P140	14	43	56	19	26	29	16	6.5	M6	18	1.5	27	560	560	250	250	250	250	250	250
WJ200UM-01-16-□-P40	4	110	132	46	34.5	36	18	9	M8	27	2.5	33	980	980	400	400	400	400	400	400
WJ200UM-01-16-□-P90	9	110	132	46	34.5	36	18	9	M8	27	2.5	33	980	980	400	400	400	400	400	400
WJ200UM-01-16-□-P140	14	110	132	46	34.5	36	18	9	M8	27	2.5	33	980	980	400	400	400	400	400	400
WJ200UM-01-16-□-P230	23	110	132	46	34.5	36	18	9	M8	27	2.5	33	980	980	400	400	400	400	400	400
WJ200UM-01-20-□-P40	4	222	275	95	42.5	45	27	9	M8	36	2.5	38	1,500	1,500	500	500	500	500	500	500
WJ200UM-01-20-□-P90	9	222	275	95	42.5	45	27	9	M8	36	2.5	38	1,500	1,500	500	500	500	500	500	500
WJ200UM-01-20-□-P140	14	222	275	95	42.5	45	27	9	M8	36	2.5	38	1,500	1,500	500	500	500	500	500	500
WJ200UM-01-20-□-P230	23	222	275	95	42.5	45	27	9	M8	36	2.5	38	1,500	1,500	500	500	500	500	500	500

Can be combined with:



Suitable liner material:




Pillow blocks, round; change the liner without disassembly



Order key



Type	Size
<b>WJ200UMA-01-10-AL</b>	
drylin® W	Aluminum
Liner material	Size
igidur® J200	Standard
Pillow block, round	Replaceable

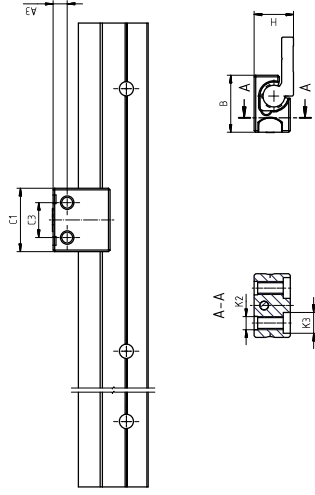

Technical data and dimensions [mm]

Part No.	Weight	B	C1	C3	A3	K2	K3 <sup>150)</sup>	H	Static load capacity		
	[g]								Coz+ [N]	Coz- [N]	
WJ200UMA-01-10-AL	18	26	29	16	6.5	M6	M5	18	1,000	1,000	200

<sup>150)</sup> Counterbore for socket cap bolt

Can be combined with:




Suitable liner material/accessories



## drylin® W profile guides | Product range

Double rails, square, hard-anodised aluminium

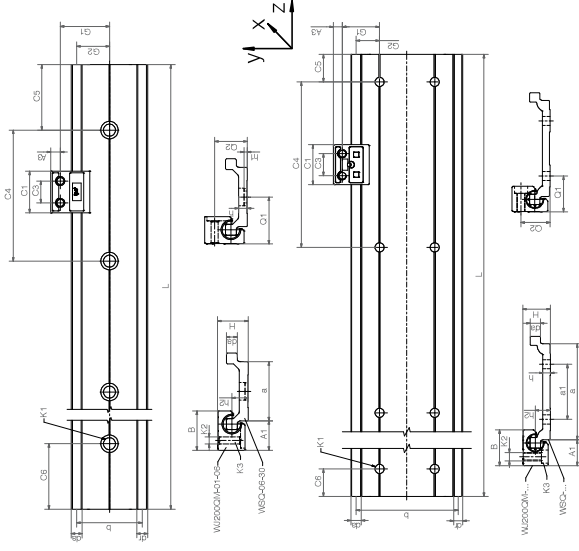

**i** Hard-anodised surfaces  
▶ Page 902

**o** Curved rail profiles  
▶ Page 906

### Technical data and dimensions [mm]

Part No.	Weight	H <sup>57)</sup>	da	dr	L	a	A1	b	h	h1	h2	G1	G2	a1 <sup>61)</sup>	Q1	Q2
	[kg/m]	±0,25	-0,1	Max.												
WSQ-06-80	0,45	14	5	3,000	27-0,4	13,5	30	4	4 <sup>58)</sup>	7,5	22,5	15	-	21,5	15	
WSQ-06-60	0,70	14	5	3,000	58-0,4	13,5	61	4	4 <sup>58)</sup>	7,0	42,5	30,5	40	17	15	
WSQ-10-40	0,92	20	7,5	6,7	4,000	36-0,5	18,5	40	5,5	5,5 <sup>58)</sup>	11	30	20	-	29	21
WSQ-10-80	1,41	20	7,5	6,7	4,000	70-0,7	18,5	74	5,5	5,5 <sup>58)</sup>	11	27	17	40	26	21
WSQ-10-120	2,02	20	7,5	6,7	4,000	116-0,7	18,5	120	5,5	5,5 <sup>58)</sup>	11	30	20	80	29	21
WSQ-16-60	1,84	27	11,5	10,7	4,000	54-0,5	35,5	58	7,5	3,5	14	43	29	-	42	28
WSQ-20-80	3,30	36	15	14,1	4,000	74-0,7	30,0	82	9,5	4,5	20	38	21	40	37	37

Part No.	C4	C5	C6	K1 for screw	Geometrical moment of inertia			Moment of resistance								
					Min.	Max.	Max.	ly	Iz	Iyby	Wbz	Wby	Wbzy			
WSQ-06-30	60	20	49,5	20	M5 <sup>58)</sup>	19,000	1,250	1,100	200							
WSQ-06-60	60	20	49,5	20	M5 <sup>58)</sup>	117,900	1,600	3,500	290							
WSQ-10-40	120	20	79,5	20	M6 <sup>58)</sup>	71,600	5,580	3,000	610							
WSQ-10-80	120	20	79,5	20	M6 <sup>58)</sup>	335,000	7,070	8,300	700							
WSQ-10-120	120	20	79,5	20	M6 <sup>58)</sup>	1,175,000	8,000	18,400	760							
WSQ-16-60	120	20	79,5	20	M8	324,700	20,500	9,400	1,700							
WSQ-20-80	120	20	79,5	20	M8	1,145,000	75,300	23,600	4,500							

<sup>57)</sup> Height dimension minus the bearing clearance <sup>58)</sup> With plain holes

<sup>61)</sup> WSQ-06-30/-10-40/-16-60 a single row of mounting holes down the centreline, WSQ-06-60/10-80/-10-120/-20-80 two parallel rows of mounting holes


Can be combined with:



930 Online tools and more information ▶ [www.igus.eu/drylinW](http://www.igus.eu/drylinW)

## drylin® W profile guides | Product range

High profile rails, square, hard-anodised aluminium

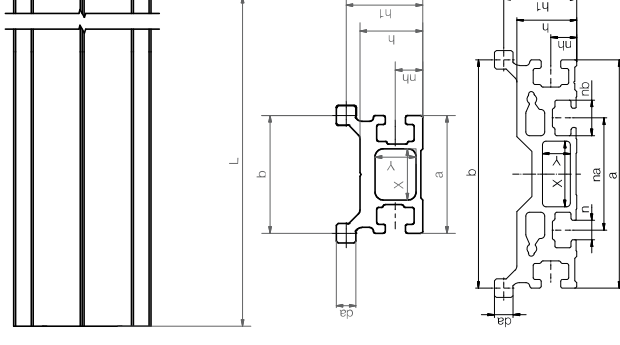

**i** Suitable end caps  
▶ Page 967

**o** Order example:  
WSX-06-30/06-60: High profile rail, square  
WSQ-06-30: Standard double rail, square

### Technical data and dimensions [mm]

Part No.	Weight	da	L	a	b	h	h1	nh	n	nb	na	X	Y	Geometrical moment of inertia	ly	Iz	Wbz	Wby	Wbzy	
	[kg/m]	-0,1	Max.																	
WSX-06-30	0,76	5	4,000	29,7	30	16	19,5	7	-	-	12	10	30,391	11,674	1,736	845				
WSX-06-60	1,39	5	4,000	61	61	16	19,5	6,9	5,2	9,5	30	17,5	7,5	212,826	17,018	6,448	1,398			

**i** Order key

Type	Length
Profile rail	
Square	
Shaft Ø	
Rail width [mm]	
Rail length [mm]	
High profile rail	
Shaft Ø	
Rail width [mm]	
Rail length [mm]	

### WS Q-06-30-3000

### WS X-06-30-4000

**i** Order key

Type	Length
Profile rail	
High profile rail	
Shaft Ø	
Rail width [mm]	
Rail length [mm]	

Can be combined with:



3D CAD files, prices and delivery time online ▶ [www.igus.eu/drylinW](http://www.igus.eu/drylinW)



## drylin® W profile guides | Product range

Linear guides – lightweight, non-metallic, strong and X-ray transparent



Order key

Type	Dimensions [mm]/Type
drylin® W	WS P C-06-30-1000
Rail	Plastic
Rail	Carbon fibre
Shaft Ø	
Rail width	
Rail length	

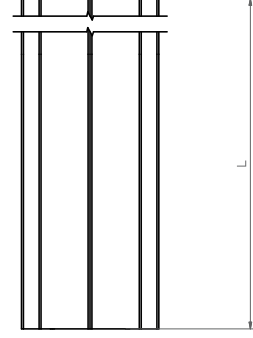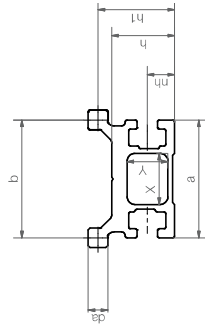

## Technical data – guide rail

Part No.	F max. radial		Weight	ly	lz
	stat. [N]	dyn. [N]			
WSPC-06-30	300	60	410 [g/m]	30,391 [mm <sup>2</sup> ]	11,674 [mm <sup>3</sup> ]

## Dimensions [mm] – guide profile

Part No.	a	b	da	h	h1	nh	X	Y	L
WSPC-06-30	30	30	5 -0.1	16	19.5	7	13	10	3,000



## drylin® W profile guides | Product range

Linear guides – lightweight, non-metallic, strong and cost-effective



Order key

Type	Dimensions [mm]/Type
drylin® W	WS P G-06-30-1000
Rail	Plastic
Rail	Fibreglass
Shaft Ø	
Rail width	
Rail length	

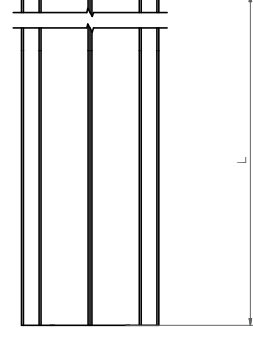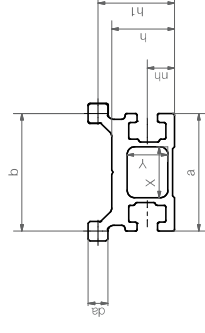

## Technical data – guide rail

Part No.	F max. radial		Weight	ly	lz
	stat. [N]	dyn. [N]			
WSPG-063001	200	50	505 [g/m]	30,391 [mm <sup>2</sup> ]	11,674 [mm <sup>3</sup> ]

## Dimensions [mm] – guide profile


Part No.	a	b	da	h	h1	nh	X	Y	L
WSPG-063001	30	30	5 -0.1	16	19.5	7	13	10	2,000

## Dimensions [mm] – complete system

Part No.	H	A1	A	A2	C	C2
WSPG-063001	30	12	52	45	60	51

# drylin® W profile guides | Product range

## Guide carriages, assembled, square

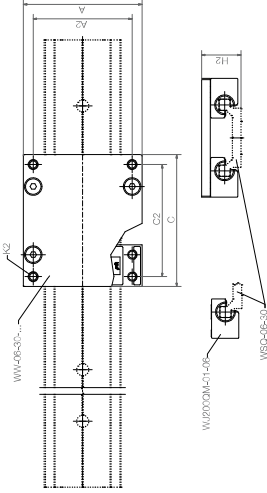

**Order key**

Type Size

**WWQ-06-30-06**


- Guide carriage
- Square
- Shafts-Ø [mm]
- Profile width
- Carriage length

### Technical data and dimensions [mm]

Part No. <sup>54)</sup>	Weight [kg]	Width			K2	H2 <sup>57)</sup>	Static load capacity			Moz [Nm]		
		A	C	Length			Coz [N]	Mox [Nm]	Moy [Nm]			
WWQ-06-30-06	0.10	54	60	45	51	M4	18	1,680	840	25	34	34
WWQ-06-30-08	0.11	54	80	45	71	M4	18	1,680	840	25	51	51
WWQ-06-30-10	0.12	54	100	45	91	M4	18	1,680	840	25	68	68
WWQ-06-60-06	0.13	85	60	76	51	M4	18	1,680	840	50	34	34
WWQ-06-60-08	0.15	85	80	76	71	M4	18	1,680	840	50	51	51
WWQ-06-60-10	0.17	85	100	76	91	M4	18	1,680	840	50	68	68
WWQ-10-40-10	0.29	73	100	60	87	M6	26	4,800	2,400	96	170	170
WWQ-10-40-15	0.34	73	150	60	137	M6	26	4,800	2,400	96	290	290
WWQ-10-40-20	0.40	73	200	60	187	M6	26	4,800	2,400	96	410	410
WWQ-10-80-10	0.34	107	100	94	87	M6	26	4,800	2,400	178	170	170
WWQ-10-80-15	0.42	107	150	94	137	M6	26	4,800	2,400	178	290	290
WWQ-10-80-20	0.50	107	200	94	187	M6	26	4,800	2,400	178	410	410
WWQ-10-120-10	0.41	153	100	140	87	M6	26	4,800	2,400	288	170	170
WWQ-10-120-15	0.54	153	150	140	137	M6	26	4,800	2,400	288	290	290
WWQ-10-120-20	0.66	153	200	140	187	M6	26	4,800	2,400	288	410	410
WWQ-16-60-10	0.71	104	100	86	82	M8	35	8,400	4,200	240	270	270
WWQ-16-60-15	0.84	104	150	86	132	M8	35	8,400	4,200	240	480	480
WWQ-16-60-20	0.97	104	200	86	182	M8	35	8,400	4,200	240	690	690
WWQ-20-80-15	1.20	134	150	116	132	M8	44	12,800	6,400	525	670	670
WWQ-20-80-20	1.30	134	200	116	182	M8	44	12,800	6,400	525	990	990
WWQ-20-80-25	1.50	134	250	116	232	M8	44	12,800	6,400	525	1,250	1,250

<sup>54)</sup> Height dimension minus the bearing clearance tolerance <sup>54)</sup> Optionally available with manual clamp, suffix "-HKA"

Can be combined with:




Suitable liner material:



# drylin® W profile guides | Product range

## Mono-slide carriages, anodised aluminium

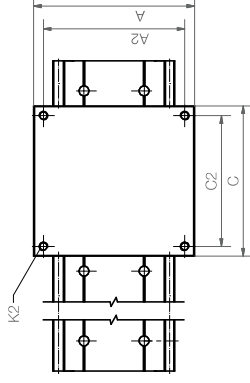

**Order key**

Type Size

**WWC-10-40-10**


- Mono-Slide guide carriage
- Shafts-Ø [mm]
- Profile width
- Carriage length

### Technical data and dimensions [mm]

Part No.	Weight [kg]	Width			K2	H2 <sup>57)</sup>	Static load capacity			Moz [Nm]		
		A	C	Length			Coz [N]	Mox [Nm]	Moy [Nm]			
WWC-06-30-06	0.07	54	60	45	51	M4	16	1,680	840	25	34	34
WWC-06-30-08	0.09	54	80	45	71	M4	16	1,680	840	25	51	51
WWC-06-30-10	0.12	54	100	45	91	M4	16	1,680	840	25	68	68
WWC-10-40-10	0.21	73	100	60	87	M6	22	4,800	2,400	96	170	170
WWC-10-40-15	0.32	73	150	60	137	M6	22	4,800	2,400	96	290	290
WWC-10-40-20	0.42	73	200	60	187	M6	22	4,800	2,400	96	410	410
WWC-10-80-10	0.28	107	100	94	87	M6	22	4,800	2,400	178	170	170
WWC-10-80-15	0.42	107	150	94	137	M6	22	4,800	2,400	178	290	290
WWC-10-80-20	0.56	107	200	94	187	M6	22	4,800	2,400	178	410	410
WWC-10-120-10	0.36	153	100	140	87	M6	22	4,800	2,400	288	170	170
WWC-10-120-15	0.54	153	150	140	137	M6	22	4,800	2,400	288	290	290
WWC-10-120-20	0.72	153	200	140	187	M6	22	4,800	2,400	288	410	410
WWC-16-60-10	0.41	104	100	86	82	M8	30	8,400	4,200	240	270	270
WWC-16-60-15	0.61	104	150	86	132	M8	30	8,400	4,200	240	480	480
WWC-16-60-20	0.80	104	200	86	182	M8	30	8,400	4,200	240	690	690
WWC-20-80-15	0.99	134	150	116	132	M8	40	12,800	6,400	525	670	670
WWC-20-80-20	1.33	134	200	116	182	M8	40	12,800	6,400	525	990	990
WWC-20-80-25	1.66	134	250	116	232	M8	40	12,800	6,400	525	1,250	1,250

<sup>57)</sup> Height dimension minus the bearing clearance tolerance

Can be combined with:




Suitable liner material:



## drylin® W profile guides | Product range

Double rails, round, hard-anodised aluminium

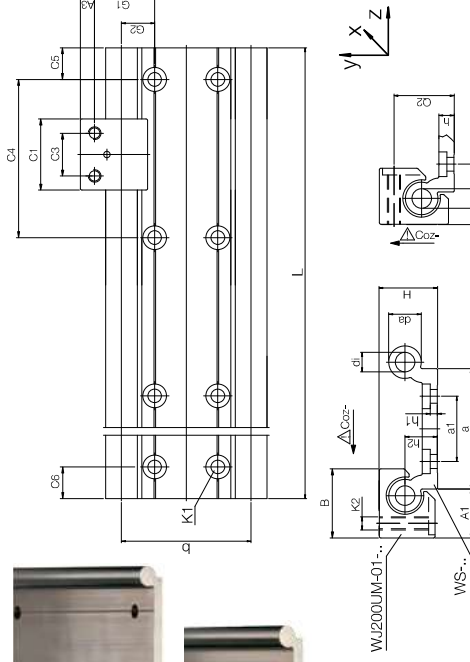

**i** Hard-anodised surfaces

► Page 902

**o** Curved rail profiles

► Page 906

This orientation not possible for

WS-10-40/

WS-10-80/WS-10-120

### Technical data and dimensions [mm]

Part No.	Weight [kg/m]	H <sup>57)</sup>	da	L	a	A1	b	h	h1	h2	G1	G2	a1 <sup>(62)</sup>	Q1	Q2
WS-10-30	0,85	18	10-0,1	-	4,000	30-0,5	16,5	30	5,5	5,5 <sup>(59)</sup>	9	25	15	-	-
WS-10-40	1,00	18	10-0,1	-	4,000	40-0,5	16,5	40	5,5	5,5 <sup>(59)</sup>	9	30	20	-	-
WS-10-60	1,50	18	10-0,1	-	4,000	74-0,7	16,5	74	5,5	5,5 <sup>(59)</sup>	9	27	17	40	-
WS-10-120	2,02	18	10-0,1	-	4,000	120-	16,5	120	5,5	5,5 <sup>(59)</sup>	9	30	20	80	-
WS-16-60	1,96	27	16-0,1	8,0	4,000	54-0,5	25,0	58	7,5	3,5	14	43	29	-	32
WS-20-80	3,30	36	20-0,1	10,2	4,000	74-0,7	30,0	82	9,5	4,5	20	38	21	40	37
WS-25-120	5,8	45	25-0,15	14,0	4,000	120-0,7	37,5	131	11,5	5,5	25	46,5	25,5	80	45,5

<sup>57)</sup> Height dimension minus the bearing clearance tolerance

<sup>62)</sup> WS-10-40/-16-60 a single row of mounting holes down the centreline; WS-10-80/-10-120/-20-80/-25-120 two parallel rows of mounting holes



Part No.	C4	C5	C6	K1 for screw	Geometrical moment of inertia			Moment of resistance		
					Min.	Max.	Max.	I <sub>y</sub> [mm <sup>4</sup> ]	I <sub>z</sub> [mm <sup>4</sup> ]	I <sub>wy</sub> [mm <sup>4</sup> ]
WS-10-30	120	20	79,5	20	79,5	M5 <sup>(59)</sup>	47,500	4,400	2,370	540
WS-10-40	120	20	79,5	20	79,5	M6 <sup>(59)</sup>	91,000	5,100	3,600	590
WS-10-60	120	20	79,5	20	79,5	M6 <sup>(59)</sup>	388,000	6,100	9,200	650
WS-10-120	120	20	79,5	20	79,5	M6 <sup>(59)</sup>	1,303,000	7,100	20,000	720
WS-16-60	120	20	79,5	20	79,5	M8	367,600	26,100	9,900	1,900
WS-20-80	120	20	79,5	20	79,5	M8	1,080,000	78,700	21,000	4,000
WS-25-120	150	25	99,5	25	99,5	M10	4,867,000	215,000	62,400	8,500

Standard hole pattern: C5 = C6, please order with drawing for C5 ≠ C6.

<sup>59)</sup> Plain holes

## drylin® W profile guides | Product range

High profile rails, round, hard-anodised aluminium

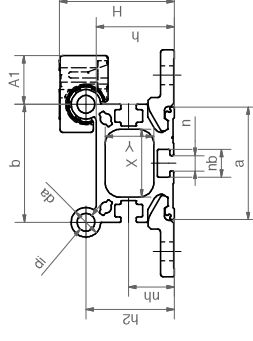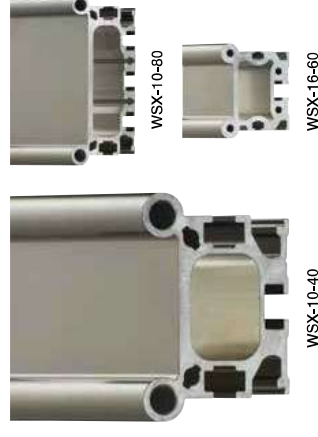

### Technical data and dimensions [mm]

Part No.	Weight [kg/m]	H <sup>57)</sup>	da	di	L	a	A1	b	h	h2	s	K1	C1	C3	G1
WSX-10-40	1,3	39 ±0,02	10	6	4,000	38,2	16,5	40	26,5	30	60	M6	29	16	30
WSX-10-80	2	39 ±0,02	10	6	4,000	72,2	16,5	74	26,5	30	94	M6	29	16	47
WSX-16-60	4,2	65 ±0,02	16	6	4,000	62	25	58	49	52	100	M8	36	18	50

nh	n	nb	X	Y	Surface inertia-moment			Moment of resistance		
					I <sub>y</sub> [mm <sup>4</sup> ]	I <sub>z</sub> [mm <sup>4</sup> ]	I <sub>wy</sub> [mm <sup>4</sup> ]	W <sub>by</sub> [mm <sup>3</sup> ]	W <sub>bz</sub> [mm <sup>3</sup> ]	
15,5	5,2	9,5	23	16	97,560	54,910	3,902	3,074		
15,5	5,2	9,5	55	16	483,653	83,613	11,515	4,684		
27,6	10	15,4	40	27,0	540,876	773,489	14,618	24,586		

<sup>57)</sup> Height dimension minus the bearing clearance tolerance

**i** Order key


**o** Order key

Type	Length
Profile rail, round	Rail length [mm]
Shaft Ø	Rail width [mm]
High profile rail	Shaft Ø
Profile rail	High profile rail
Shaft Ø	Rail width [mm]
Rail length [mm]	Rail length [mm]

### WS-10-40-3000

### WS X-10-40-4000




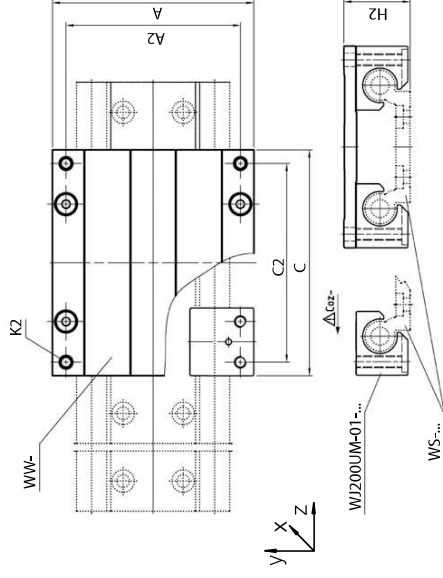


### Technical data and dimensions [mm]

Part No. <sup>54)</sup>	Weight	A	C	A2	C2	K2	H2 <sup>57)</sup>	Static load capacity				
								Coz	Mox	Moy	Moz	
	[kg]	Width Length						[N]	[Nm]	[Nm]	[Nm]	
WW-10-40-10-J200-GESG-PES	0,29	73	100	60	87	M6	24	4,800	2,400	96	170	170
WW-10-40-15-J200-GESG-PES	0,34	73	150	60	137	M6	24	4,800	2,400	96	290	290
WW-10-40-20-J200-GESG-PES	0,40	73	200	60	187	M6	24	4,800	2,400	96	410	410

<sup>57)</sup> Height dimension minus the bearing clearance tolerance <sup>54)</sup> Optionally available with manual clamp, suffix "-HKA"

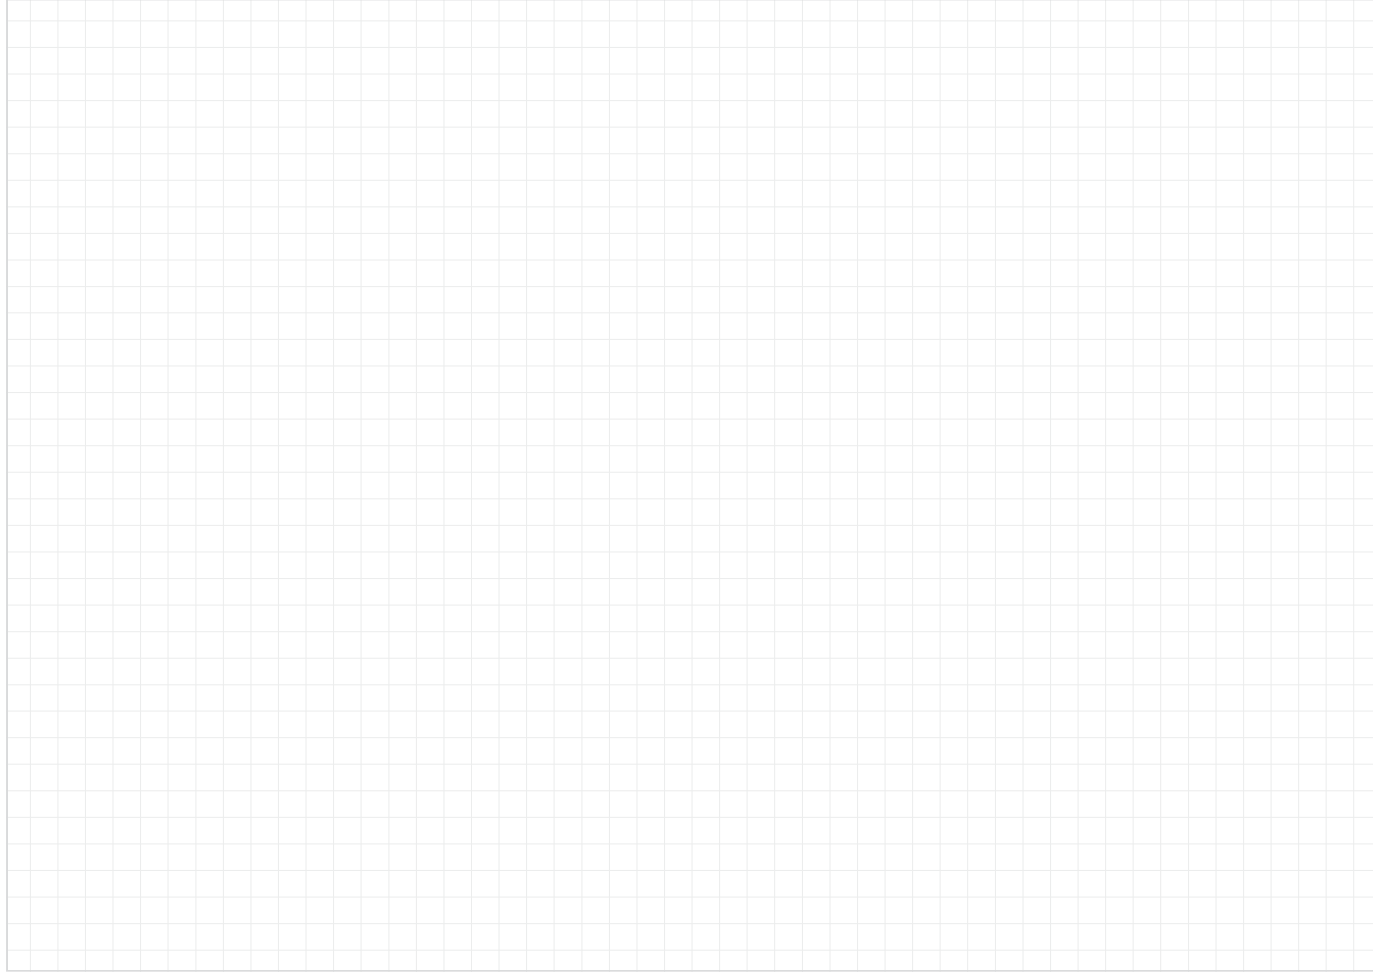



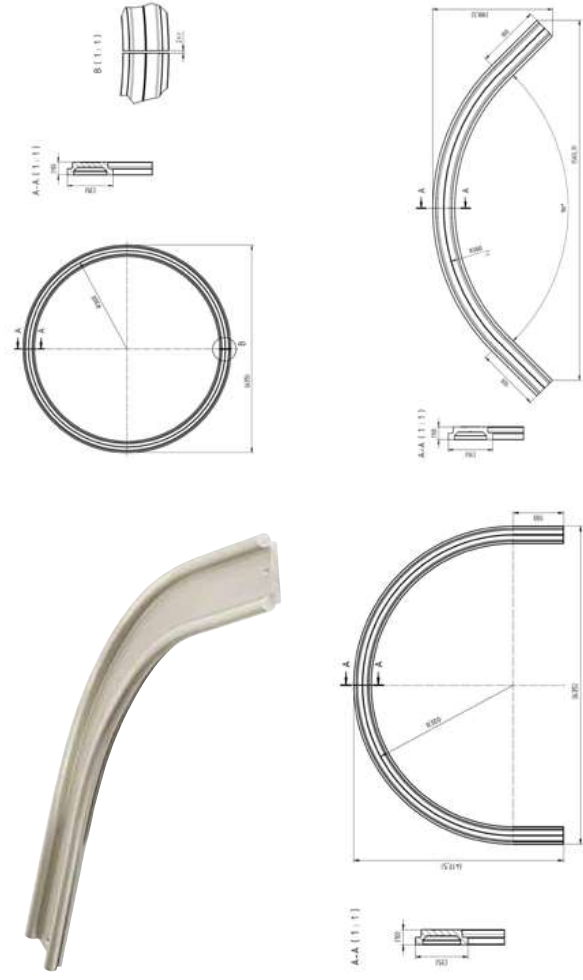

More information  
▶ [www.igus.eu/curved](http://www.igus.eu/curved)



Curved rail profiles  
▶ Page 906

### Technical data and dimensions [mm]

Part No. <sup>54)</sup>	Matching carriage for curved rail	Design	Bend radius	End straight
WSB-06-30-RK300F <sup>51)</sup>	WWB-06-30-06-R175	Full circle	60	–
WSB-06-30-RK300HS	WWB-06-30-06-R175	Half circle	60	100
WSB-06-30-RK300QS	WWB-06-30-06-R175	Quarter circle	60	100
WSB-06-30-RK500HS	WWB-06-30-06-R400	Half circle	60	100
WSB-06-30-RK500QS	WWB-06-30-06-R400	Quarter circle	60	100

<sup>51)</sup> The F version (full circle) has a transition of 2mm (±0.2). Due to the bending process, material displacement tolerances, which can be up to several millimetres depending on the bend direction and radius, must be taken into account.

RK: Radius curved bending

S: Straight rail ends in the case of semicircle and quarter circle

Can be combined with:



942 Online tools and more information ▶ [www.igus.eu/drylinW](http://www.igus.eu/drylinW)




3D CAD files, prices and delivery time online ▶ [www.igus.eu/drylinW](http://www.igus.eu/drylinW) 943



Order key

Type	Size	Option
Curved rail profile	Shaft Ø	Profile width [mm]
		RK: Radius curved bending
		With spring pre-load
		Full circle

### WSB-06-30-RK300-F

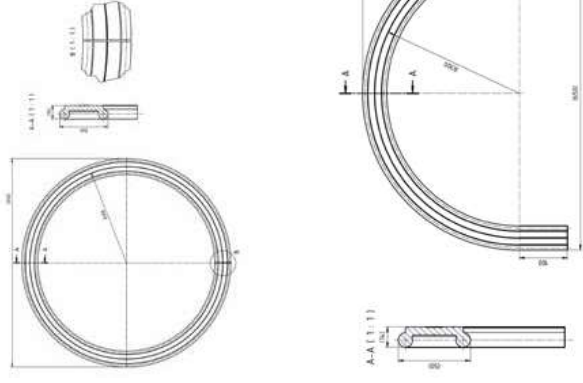

### Technical data and dimensions [mm]

Part No. <sup>54)</sup>	Matching carriage for curved rail	Design	Bend radius	End straight
WSB-10-40-RK300F <sup>51)</sup>	WWB-10-40-10-R250	Full circle	60	–
WSB-10-40-RK300HS	WWB-10-40-10-R250	Half circle	60	100
WSB-10-40-RK300QS	WWB-10-40-10-R250	Quarter circle	60	100
WSB-10-40-RK500F <sup>51)</sup>	WWB-10-40-10-R400	Full circle	102	–
WSB-10-40-RK500HS	WWB-10-40-10-R400	Half circle	102	100
WSB-10-40-RK500QS	WWB-10-40-10-R400	Quarter circle	102	100

<sup>51)</sup> The F version (full circle) has a transition of 2mm (±0.2). Due to the bending process, material displacement tolerances, which can be up to several millimetres depending on the bend direction and radius, must be taken into account.

RK: Radius curved bending

S: Straight rail ends in the case of semicircle and quarter circle



942 Online tools and more information ▶ [www.igus.eu/drylinW](http://www.igus.eu/drylinW)



3D CAD files, prices and delivery time online ▶ [www.igus.eu/drylinW](http://www.igus.eu/drylinW) 943

Single bearings for curved rails




Order key



Type	Size	Option
------	------	--------

**W13U B P-01-10-LLZ**

drylin® W		
Liner material	iglidur® I3	
Curved		
Pre-load	Standard	
Size		
Floating bearing in		y-direction

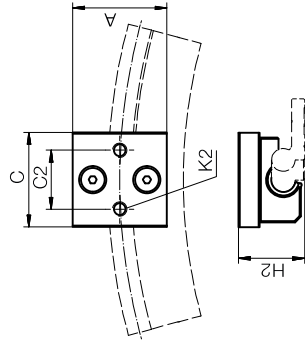**Dimensions [mm]**

Part No.	Weight [g]	A	C	C2	K2	H2
W13UBP-01-10	50	40	40	25	M6	28
W13UBP-01-10-R300-LLZ	44	40	40	25	M6	28
W13UBP-01-10-R500-LLZ	44	40	40	25	M6	28
W13UBP-01-10-LLZ	44	40	40	25	M6	28

Can be combined with:



WSB-...

Can be combined with:



WS-...-ES-FG WSB-...

Carriage for curved rail



Order key

Type	Size	Option
------	------	--------


**WWB-10-40-10-P-HKA**

Guide carriages for	Curved rails	
Shaft Ø		
Profile width [mm]		
Carriage length [mm]		
With spring pre-load		
With manual clamp		

Options:

Blank: Standard

HKA: With manual clamp

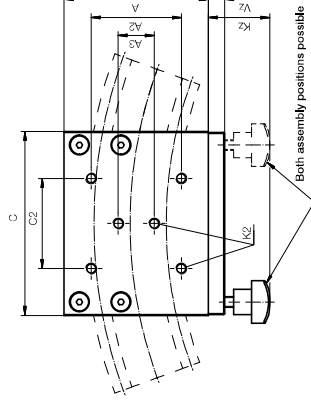Curved rail profiles  
▶ Page 906**Technical data and dimensions [mm]**

Part No. <sup>54)</sup>	Weight [kg]	A	C	A2	A3	C2	K2	H2	Vz	Kz
		±0.25	-0.1							
WWB-06-30-06 <sup>54)</sup>	0.31	58	60	30	16	30	M4	20	9	34
WWB-06-30-06-P <sup>54)</sup>	0.31	58	60	30	16	30	M4	20	7.5	29
WWB-06-30-06-R300 <sup>143)</sup> -P <sup>54)</sup>	0.31	58	60	30	16	30	M4	20	7.5	29
WWB-10-40-10 <sup>54)</sup>	0.35	80	102	50	20	50	M6	28	9	34
WWB-10-40-10-P <sup>54)</sup>	0.35	80	102	50	20	50	M6	28	9	34
WWB-10-40-10-R300 <sup>143)</sup> -P <sup>54)</sup>	0.35	80	102	50	20	50	M6	28	9	34

<sup>54)</sup> Optionally available with manual clamp, suffix "-HKA"<sup>143)</sup> Optional for 500mm radius = R500

WSB-...



WSB-...




More information


▶ www.igus.eu/curved

## drylin® W profile guides | Product range

### Double rails, reduced weight, hard-anodised aluminium

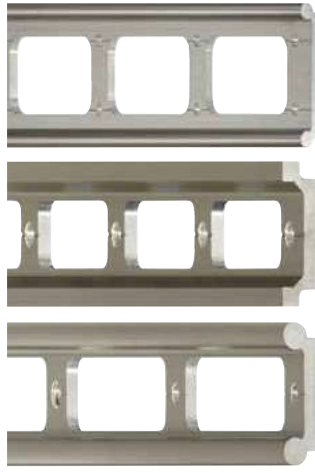

- 30% weight reduction through machined recesses
- Suitable pillow blocks and carriages made from plastic, aluminium, zinc die-casting or stainless steel

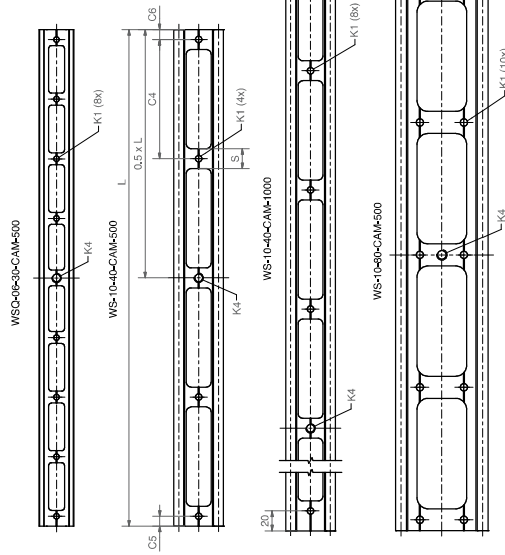

### drylin® W guide rails – dimensions [mm]

Part No.	Identical profile	L	C4	C5	C6	S	K1 for screw DIN 192	K4	Weight [g]
WSQ-06-30-CAM-500	WSQ-06-30	500	60	10	10	12	M5	3/8" 16-UNC <sup>(65)</sup>	159
WS-10-40-CAM-500	WS-10-40	500	120	10	10	20	M6	3/8" 16-UNC <sup>(65)</sup>	353
WS-10-40-CAM-1000	WS-10-40	1,000	120	20	20	20	M6	3/8" 16-UNC <sup>(65)</sup>	706
WS-10-80-CAM-500	WS-10-80	500	120	10	10	20	M6	3/8" 16-UNC <sup>(65)</sup>	482

<sup>(65)</sup> \* UNC = Unified National Coarse, Anglo-American. Screw thread standard

Application example:  
camera slider with standard rail and carriage  
▶ [www.igus.eu/camera](http://www.igus.eu/camera)



## drylin® W profile guides | Product range


### Double rails/carriages for camera slider



- Wear-resistant, smooth and quiet motion
- Adjustable brake level due to the turn-to-fit function
- Easy and fast assembly
- Further dimensions such as standard WS rails  
▶ [Page 936](#)

#### Technical options:

- Adjustable bearing housing ▶ [Page 926](#)
- Manual clamp ▶ [Page 962](#)

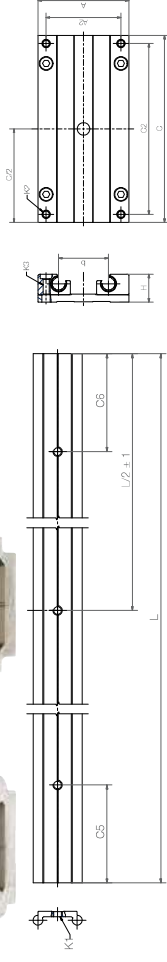

### drylin® W special rails with 3 holes, 3/8" thread

#### Dimensions [mm]

Part No.	Size	L	C5	C6	Weight [kg/m]
WSQ-06-30-SL-1000	06	1,000	±1	100	0.45
WSQ-06-30-SL-1500	06	1,500	100	100	0.45
WS-10-30-SL-1000	10	1,000	100	100	0.85
WS-10-30-SL-1500	10	1,500	100	100	0.85
WS-10-40-SL-1500	10	1,500	100	100	1.00
WS-10-80-SL-1000	10	1,000	100	100	1.50
WS-10-80-SL-1500	10	1,500	100	100	1.50
WS-16-60-SL-1000	16	1,000	100	100	1.96
WS-16-60-SL-1500	16	1,500	100	100	1.96
WS-20-80-SL-1000	20	1,000	100	100	3.30
WS-20-80-SL-1500	20	1,500	100	100	3.30

### drylin® W complete carriage with ø10mm through hole for 3/8" thread

#### Dimensions [mm]

Part No.	Size	C	A	Part No.	Size	C	A
WW-06-30-06-SL	06	60	54	WW-10-80-15-SL <sup>(65)</sup>	10	150	107
WW-06-30-08-SL	06	80	54	WW-10-80-20-SL <sup>(65)</sup>	10	200	107
WW-06-30-10-SL	06	100	54	WW-16-60-10-SL <sup>(65)</sup>	16	100	104
WW-10-30-10-SL <sup>(65)</sup>	10	100	63	WW-16-60-15-SL <sup>(65)</sup>	16	150	104
WW-10-30-15-SL <sup>(65)</sup>	10	150	63	WW-16-60-20-SL <sup>(65)</sup>	16	200	104
WW-10-40-10-SL <sup>(65)</sup>	10	100	73	WW-20-80-15-SL <sup>(65)</sup>	20	150	134
WW-10-40-15-SL <sup>(65)</sup>	10	150	73	WW-20-80-20-SL <sup>(65)</sup>	20	200	134
WW-10-40-20-SL <sup>(65)</sup>	10	200	73	WW-20-80-25-SL <sup>(65)</sup>	20	250	134
WW-10-80-10-SL <sup>(65)</sup>	10	100	107				

<sup>(65)</sup> Optionally available with manual clamp, suffix "-HKA"

<sup>(65)</sup> Optional with adjustable "Turn-to-Fit" bearing (Order example: WWE-...)

# drylin® W profile guides | Product range

## Hybrid slider carriages with four double roller bearings:




Type	Dimensions	Design
drylin® W	WWH-21-10-40-10-SL	Slider carriage
Hybrid carriages	Installation size	Carriage length [mm]
Double roller bearing		



Ø 10mm through hole for 3/8" thread for cameras


**i** Optionally available with manual clamp, suffix "-HKA"

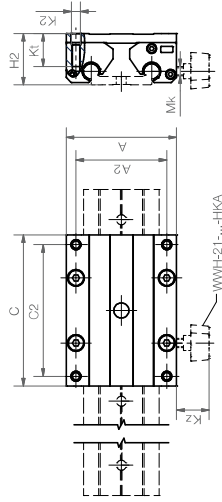

### Technical data and dimensions [mm]


Part No.	Weight [kg]	Width		C	Length	A2	C2	K2	Kt	H2	Static load capacity	
		A	C								Coy	IN
WWH-21-10-40-10-SL	0.59	73	100	60	87	M6	21	34	1,400			
WWH-21-10-40-15-SL	0.64	73	150	60	137	M6	21	34	1,400			
WWH-21-10-40-20-SL	0.70	73	200	60	187	M6	21	34	1,400			
WWH-21-10-80-10-SL	0.64	107	100	94	87	M6	21	34	1,400			
WWH-21-10-80-15-SL	0.72	107	150	94	137	M6	21	34	1,400			
WWH-21-10-80-20-SL	0.80	107	200	94	187	M6	21	34	1,400			
WWH-21-16-60-10-SL	1.31	104	100	86	82	M8	29	49	2,400			
WWH-21-16-60-15-SL	1.44	104	150	86	132	M8	29	49	2,400			
WWH-21-16-60-20-SL	1.57	104	200	86	182	M8	29	49	2,400			
WWH-21-20-80-15-SL	1.72	134	150	116	132	M8	24	57	3,360			
WWH-21-20-80-20-SL	1.82	134	200	116	182	M8	24	57	3,360			
WWH-21-20-80-25-SL	2.02	134	250	116	232	M8	24	57	3,360			

Can be combined with:



Can be combined with camera slider rails

► Page 946

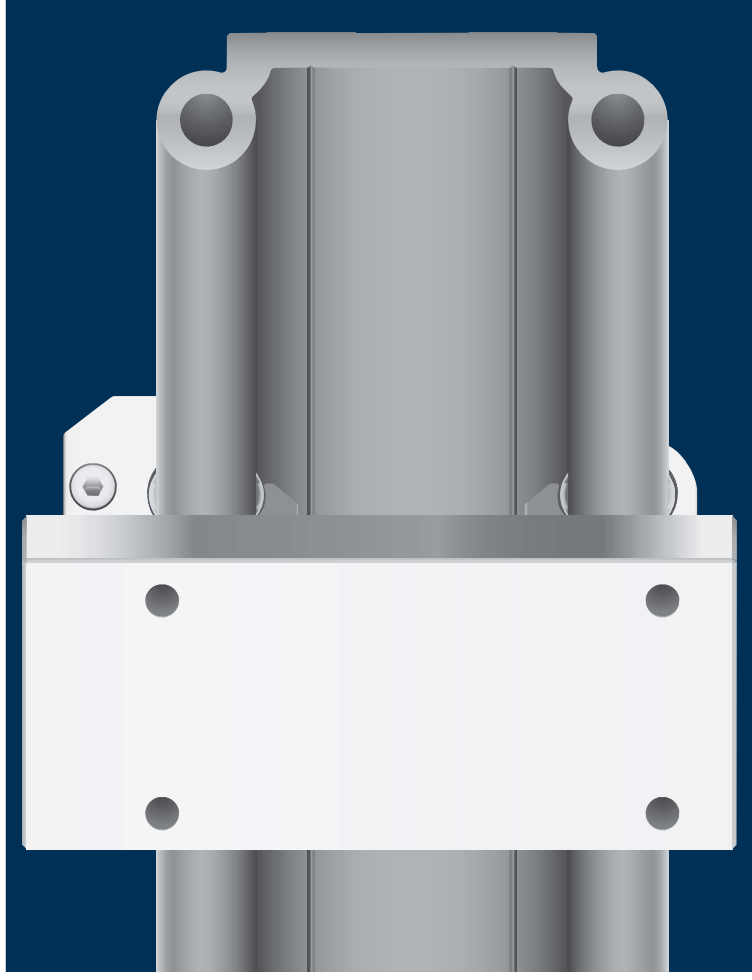

# drylin® linear technology – drylin® W hybrid roller bearings



Lubrication-free roll and slide

Low drive force

For manual adjustment

Suitable for radial loads

Single bearings and complete carriages

# drylin® W hybrid roller bearings | Advantages

## Hybrid roller bearings from the drylin® W linear construction kit

drylin® W rail made from hard-anodised aluminium

Housing made of robust zinc die-casting or durable stainless steel

Lubrication-free and quiet operation

Compact aluminium carriage with assembled drylin® W hybrid roller bearing

Liners made from iglidur® high-performance polymers

Can be combined with drylin® W linear profile rails

Easy to move thanks to the combination of rolling and sliding

Single and double rails



## Combined sliding and rolling for low driving forces

drylin® hybrid roller bearings offer an unique lubrication-free combination of plain and roller bearings. The integrated rollers achieve low driving forces, while the sliding effect simultaneously protect against radial loads. This makes drylin® hybrid roller bearings ideal for manual adjustments in door applications (e.g. machine doors, safety doors), but also in mobile control panels. The efficient design using plastics with zinc die-casting also cuts costs. hybrid roller bearings can be used on various hard-anodised aluminium profiles from the drylin® W linear construction kit.

- Smooth operation
- Low-profile
- Offset and abuse forces are easily absorbed by sliding elements
- Location on rail ensures reliability
- Matching guide rails made from hard-anodised aluminium
- Low driving force required
- Cost-effective

### Typical application areas

- Machine doors
- Safety doors
- Operator panels



### Available from stock

Detailed information about delivery time online.



### Price breaks online

No minimum order value. No minimum order quantity.



### Service life calculation

► [www.igus.eu/drylin-expert](http://www.igus.eu/drylin-expert)



### Tightening torque for drylin® metallic screws

► Page 907

# drylin® W hybrid roller bearings | Product overview

## Slide and roll



### Hybrid roller bearings with single roller

- Lubrication-free due to bearing supported plastic roller
  - Low displacement force
  - Can be combined with drylin® W single and double rails
- Page 954



### Hybrid roller bearing made of stainless steel with single roller

- Corrosion-free due to stainless steel housing
  - Easy to clean
- Page 956



### Hybrid roller bearings with double rollers

- Low coefficient of rolling friction is still maintained with deviating load directions
  - Increased load capacity
  - Variable installation position
- Page 955



### Hybrid roller bearing made of stainless steel with double rollers

- Corrosion-free due to stainless steel housing
  - High media resistance
- Page 956



### Complete carriages WWH

- Complete carriage with 4 integrated hybrid roller bearings
  - For horizontal installation
  - Variable carriage lengths and widths
- Page 959



Suitable rail profiles  
► From page 922



Camera slider  
► From page 947




The smooth, quiet operation and the enormous cost advantages are obtained by the use of the drylin® linear bearings on the hard-anodised guide shaft to guide the doors of machine tools.



Adjustment control panel unit



Camera stand with drylin® W hybrid roller bearings for far smoother running. Vertical movements are now also possible.

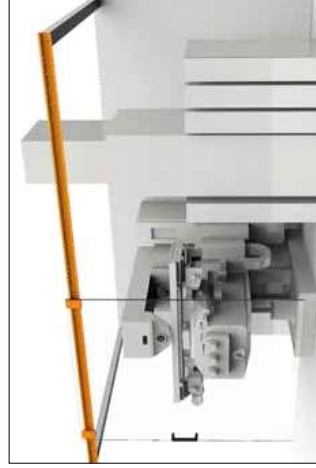


The new drylin® W hybrid carriage with "door opener" function.




drylin® W hybrid roller bearings in combination with drylin® W profile guides offer optimum opportunities to construct dollies and sliders.

**drylin® W hybrid roller bearings type 21**

The drylin® W hybrid roller bearings in the WJRM-21-... type series are each equipped with two bearing-supported plastic rollers at an angle of 70° or 80°. Available in three installation sizes, they can be combined with drylin® W single and double rails. The double roller bearings offer a higher load capacity than with a vertical bearing load on the installation area (y-direction). The low coefficient of rolling friction is still maintained with load directions that slightly deviate from this.

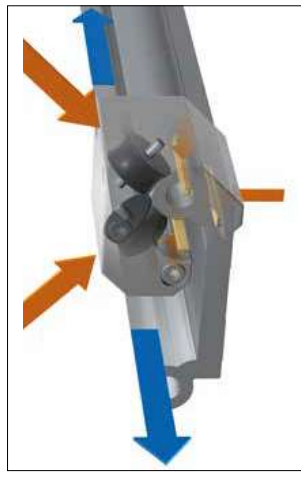

Hybrid double roller bearing applicable force absorption




Forces absorbed by hybrid roller bearing


Installation position 01

Installation position 02

Installation position WJRM-01-...

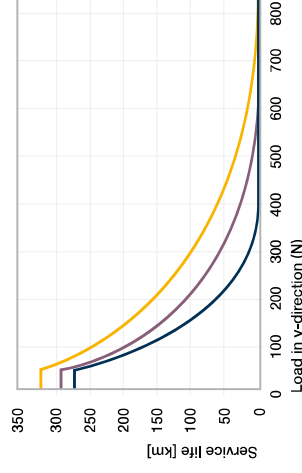

■ WJRM-01-10 ■ WJRM-01-16 ■ WJRM-01-20

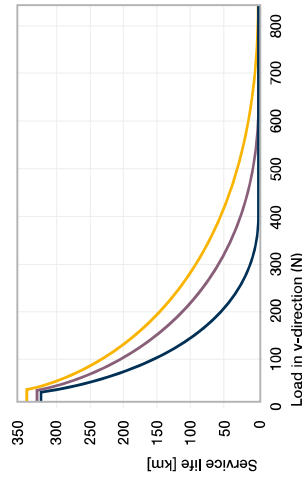

Installation position WJRM-21-...




■ WJRM-21-10 ■ WJRM-21-16 ■ WJRM-21-20

# drylin® W hybrid roller bearings | Product range

## Hybrid roller bearings with a plain bearing-supported plastic roller



Type	Size
Hybrid roller bearings	Size 10
Hybrid roller bearings	Single roller bearing

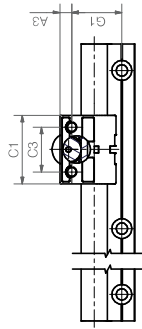

Installation position 01

Installation position 02



Installation position 02 in installation size ø10 when using a WJRM-02-10 hybrid roller bearing

### Technical data and dimensions [mm]

Part No.	Static load capacity Co [N]	Dyn. load capacity Cz+ at total running distance [km]			F · v [N · m/s] Max.
		10	200	200	
WJRM-01-10 <sup>7)</sup>	250	90	50	70	50
WJRM-01-16	400	140	70	105	80
WJRM-01-20	550	200	100	150	80

Part No.	Coefficient of friction in z-direction [μ]	Weight [g]			H	K2 for thread	K3 for screw	Q1	Q2				
		A1	A3	B									
WJRM-01-10 <sup>7)</sup>	< 0.1	46	16.5	26	2.5	35	22	18	M6	M5	-	-	
WJRM-01-16	< 0.1	131	25	9	34.5	5	48	30	33	27	M8	M6	32
WJRM-01-20	< 0.1	232	30	9	42.5	6	52	34	38	36	M8	M6	37

<sup>7)</sup> Deviating from WJRM-02-10, available with an expanded opening angle for installation position 02

Can be combined with:





# drylin® W hybrid roller bearings | Product range

## Hybrid roller bearings with double angled plastic rollers



Type	Size
Hybrid roller bearings	Size 10
Hybrid roller bearings	Double roller bearing

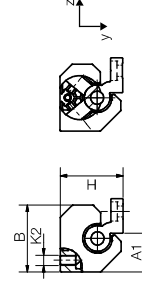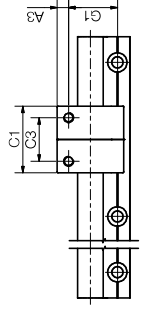

### Technical data and dimensions [mm]

Part No.	Static load capacity Co [N]	Dyn. load capacity Cz+ at total running distance [km]			F · v [N · m/s] Max.
		10	200	200	
WJRM-21-10	350	125	70	50	50
WJRM-21-16	600	210	105	80	80
WJRM-21-20	840	300	150	80	80

Part No.	Coefficient of friction in y-direction [μ]	Weight [g]			H	K2 for screw			
		A1	A3	B					
WJRM-21-10	< 0.1	115	16.5	31	35	27	28	M6	
WJRM-21-16	< 0.1	250	25	9	44	48	30	33	M8
WJRM-21-20	< 0.1	320	30	9	52	52	34	38	M8

WJRM-21-10 and WJRM-21-16: 70° angle between the rollers / WJRM-21-20: 80° angle between the rollers




Optionally available with manual clamp, suffix "-HKA"



Can be combined with:



WJRM-01 with single roller

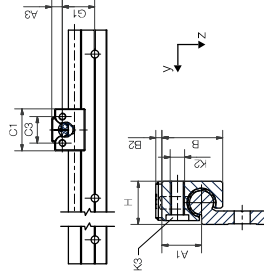

Order key


Type	Size	Material
Hybrid roller bearing	Size 10	Stainless steel
<b>WJRM-01-10 - ES</b>		
roller bearing	Single roller bearing	Material
		ES: Stainless steel (AISI 316Ti)
		ES-FG: Stainless steel precision casting AISI 316
		AL: Aluminium

Technical data and dimensions [mm]

Part No.	Static load capacity Co	Dyn. load capacity Cz+ at total running distance [km]	F · v
	10 [N]	100 [N]	200 [N · m/s]
WJRM-01-10-ES-FG	250	90	50
WJRM-01-10-AL	250	90	50

Part No.	coefficient of friction in z-direction	Weight	A1	A3	B	B2	C1	C3	G1	H	K2	K3 for screw
WJRM-01-10-ES-FG	< 0.1	57 [g]	16.5	6.5	26	2.5	35	22	27	18	M6	M5
WJRM-01-10-AL	< 0.1	18 [g]	16.5	6.5	26	2.5	35	22	27	18	M6	M5

WJRM-21 with double roller

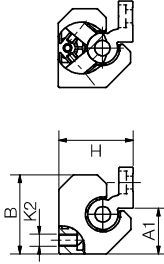


Order key

Type	Size	Material
Hybrid roller bearing	Size 20	Stainless steel
<b>WJRM-21-20 - ES</b>		
roller bearing	Double roller bearing	Material
		ES: Stainless steel (AISI 316Ti)
		ES-FG: Stainless steel precision casting AISI 316

Technical data and dimensions [mm]

Part No.	Static load capacity Co	Dyn. load capacity Cz+ at total running distance [km]	F · v
	10 [N]	100 [N]	200 [N · m/s]
WJRM-21-20-ES-FG	840	300	80


Part No.	coefficient of friction in z-direction	Weight	A1	A3	B	C1	C3	G1	H	K2	K3 for screw
WJRM-21-20-ES-FG	< 0.1	504 [g]	30	9	52	52	34	38	49	M8	M5

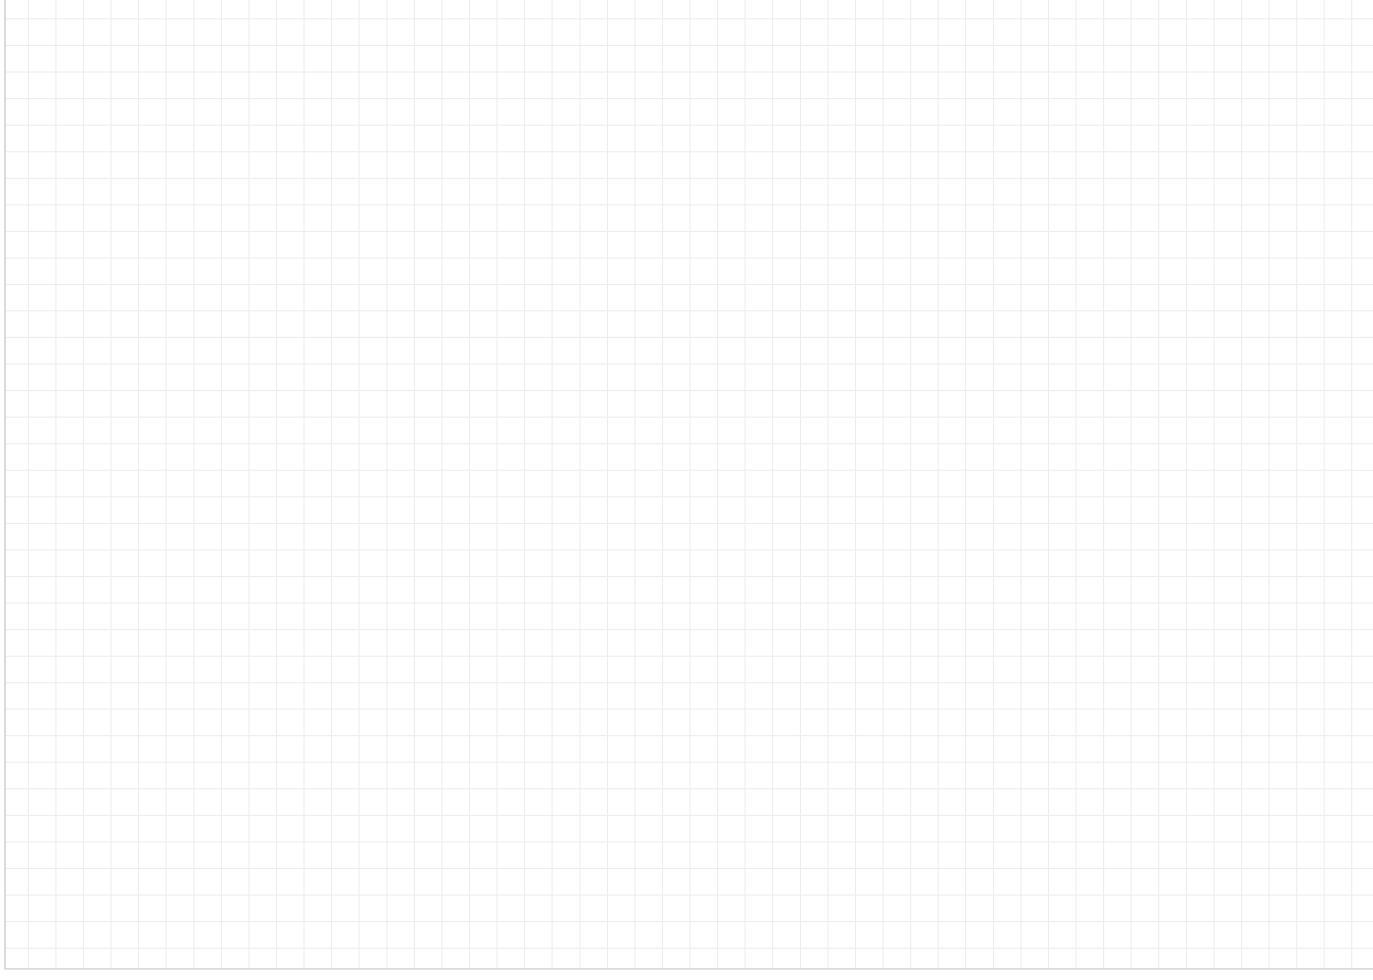



# drylin® W hybrid roller bearings | Product range

## Hybrid carriages for lateral installation

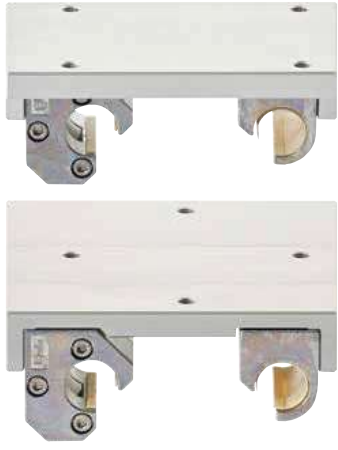


### Order key

Type	Size	Option
drylin® W	WWR-21-80 - 01	Compact
Hybrid carriages		
Double roller bearing		
Installation size		

Options:

- 01: Carriage, short design
- 15: Carriage, long design

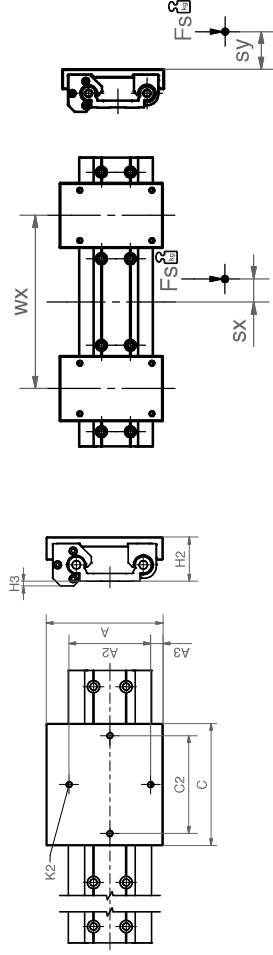


### Technical data and dimensions [mm]

Part No.	Width Length					
	A	C	A2	C2	H2	H3
WWR-21-80-01	143	90	100	70	M8 54 15	6
WWR-21-80-15	143	150	100	120	M8 54 15	6

Order example:

WWR-21-80-01 = Assembled single hybrid carriage as a "door opener" with two single roller hybrid bearings and two double roller hybrid bearings

Can be combined with:



WS-20-80 WS-...ES-FG WSX-...


# drylin® W hybrid roller bearings | Product range

## Hybrid carriages with four double roller bearings

### Order key

Type	Dimensions
drylin® W	WWH-21-10-40-10
Hybrid carriages	
Double roller bearing	
Installation size	
Carriage length [mm]	

Optionally available with manual clamp, suffix "-HKA"

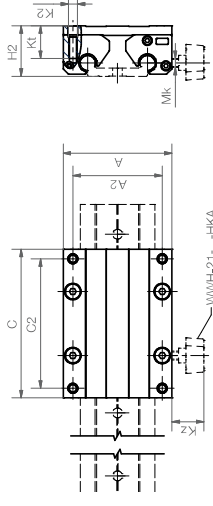

### Technical data and dimensions [mm]

Part No.	Weight [kg]	Width Length						H2	Kt	K2	Coy	Static load capacity [N]
		A	C	A2	C2	H2	Coy					
WWH-21-10-40-10	0.59	73	100	60	87	M6 21	34	21	M6	21	1,400	
WWH-21-10-40-15	0.64	73	150	60	137	M6 21	34	21	M6	21	1,400	
WWH-21-10-40-20	0.70	73	200	60	187	M6 21	34	21	M6	21	1,400	
WWH-21-10-80-10	0.64	107	100	94	87	M6 21	34	21	M6	21	1,400	
WWH-21-10-80-15	0.72	107	150	94	137	M6 21	34	21	M6	21	1,400	
WWH-21-10-80-20	0.80	107	200	94	187	M6 21	34	21	M6	21	1,400	
WWH-21-10-120-10	0.71	153	100	140	87	M6 21	34	21	M6	21	1,400	
WWH-21-10-120-15	0.84	153	150	140	137	M6 21	34	21	M6	21	1,400	
WWH-21-10-120-20	0.96	153	200	140	187	M6 21	34	21	M6	21	1,400	
WWH-21-16-60-10	1.31	104	100	86	82	M8 29	49	29	M8	29	2,400	
WWH-21-16-60-15	1.44	104	150	86	132	M8 29	49	29	M8	29	2,400	
WWH-21-16-60-20	1.57	104	200	86	182	M8 29	49	29	M8	29	2,400	
WWH-21-20-80-15	1.72	134	150	116	132	M8 24	57	24	M8	24	3,360	
WWH-21-20-80-20	1.82	134	200	116	182	M8 24	57	24	M8	24	3,360	
WWH-21-20-80-25	2.02	134	250	116	232	M8 24	57	24	M8	24	3,360	

Can be combined with:




WS-20-80 WS-...ES-FG WSX-...

# drylin® W hybrid roller bearings | Product range




Hybrid carriages with four single roller bearings for horizontal installation



Order key

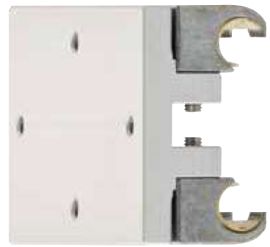

Type	Dimensions
drylin® W	WWH-10-40-10
Hybrid carriages	Installation size
	Carriage length [mm]

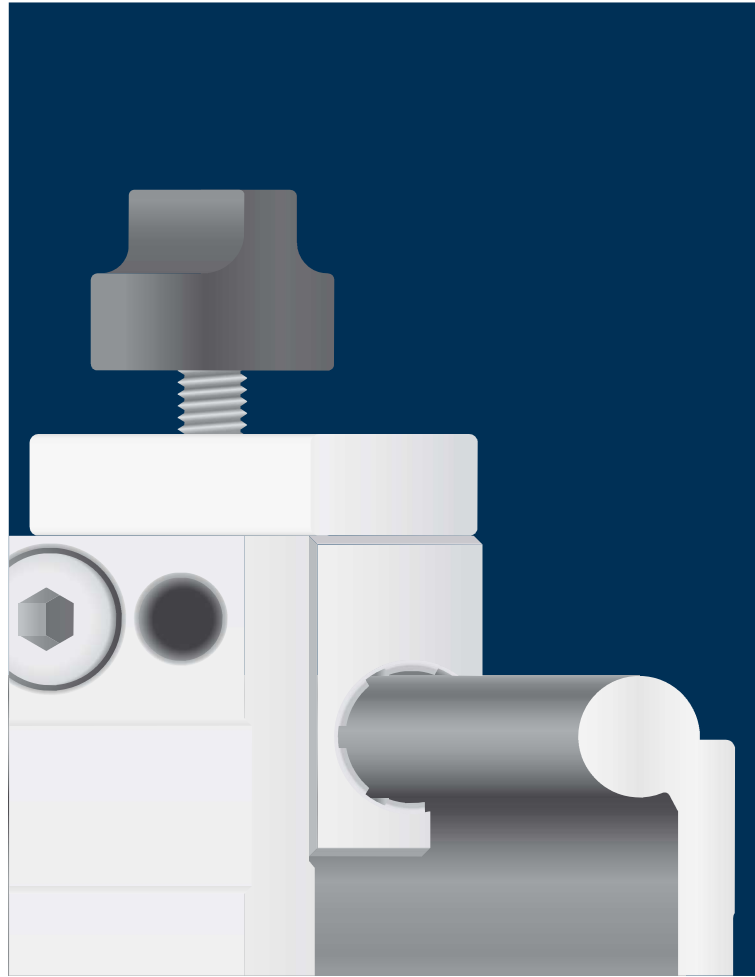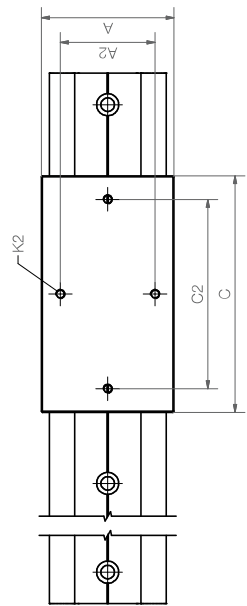

### Technical data and dimensions [mm]

Part No.	Weight		A	A2	C	C2	K2	H2	Stat. load capacity			
	[kg]	±0.17							Coy [N]	Coz [N]	Moz [Nm]	
WWH-10-40-10	0.35	58	40	100	80	M5	34	1,000	1,000	20	16	32
WWH-16-60-15	0.96	84	60	150	120	M6	46	1,600	1,600	45	38	77
WWH-20-80-25	1.78	114	90	250	220	M6	55	2,200	2,200	90	435	435

Can be combined with:



## drylin® linear technology – Accessories

Manual clamps

Liners


End caps

Slot nuts

Clamps



Accessories: Manual clamp for simple positioning

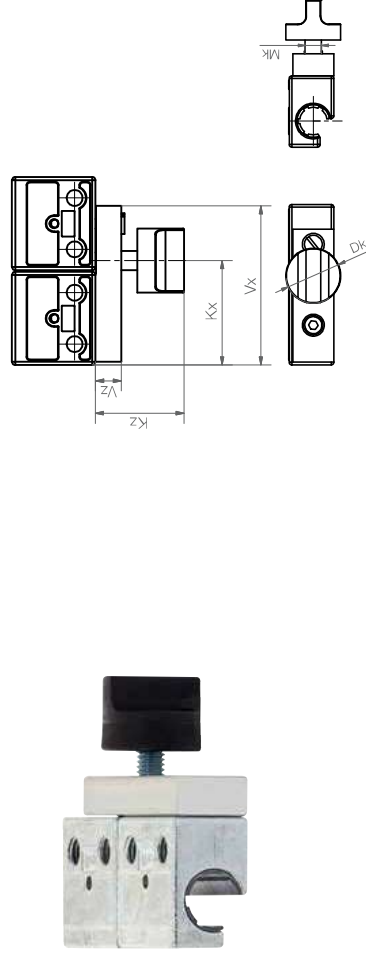

## Technical data and dimensions [mm]

Part No.	Mk	Vx	Kx	Vz	Kz	Dk	Min. holding force <sup>67)</sup>	Min. tightening torque
WHKA-10 <sup>68)</sup>	M6	50	33	8	28	20	30N	0,8Nm
WHKA-16 <sup>68)</sup>	M8	72	41	10	31	28	60N	1,5Nm
WHKA-20 <sup>68)</sup>	M8	90	62	10	31	28	70N	1,5Nm
WHKA-25 <sup>68)</sup>	M8	96	65	12	31	28	70N	1,5Nm

<sup>67)</sup> Condition: dry rail surface<sup>68)</sup> The manual clamp is also available assembled as a complete carriage (suffix "-HKA", order example: WW-10-40-10-HKA). Dimensions complete carriage WWQ ▶ Page 939

## Accessories: aluminium manual clamp




## Technical data and dimensions [mm]

Part No.	Mk	Vx	Kx	Vz	Kz	Dk	Min. holding force <sup>67)</sup>	Min. tightening torque
WHKA-10-AL <sup>69)</sup>	M6	50	33	8	28	20	30N	0,8Nm
WHKA-16-AL <sup>69)</sup>	M8	72	41	10	31	28	60N	1,5Nm
WHKA-20-AL <sup>69)</sup>	M8	90	62	10	31	28	70N	1,5Nm
WHKA-25-AL <sup>69)</sup>	M8	96	65	12	31	28	70N	1,5Nm

<sup>67)</sup> Condition: dry rail surface<sup>69)</sup> The manual clamp is also available assembled as a complete carriage (suffix "-AL-HKA", order example: WW-10-40-10-HKA). Dimensions complete carriage WWQ ▶ Page 939

Accessories: Manual clamp for square rails

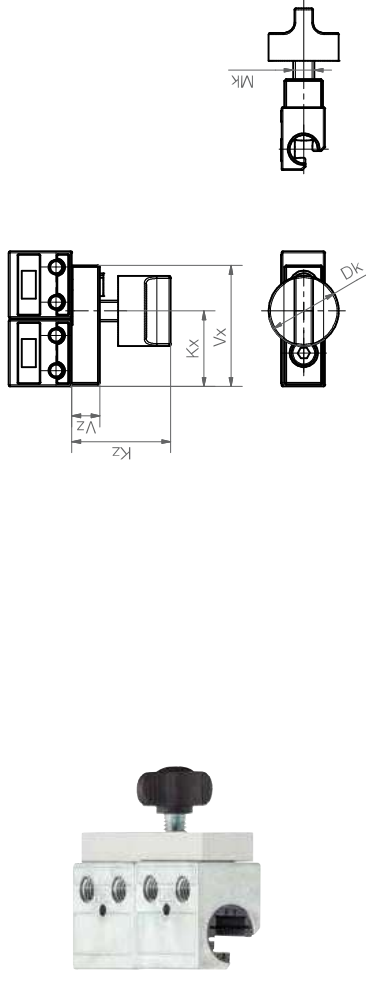


## Technical data and dimensions [mm]

Part No.	Mk	Vx	Kx	Vz	Kz	Dk	Min. holding force <sup>67)</sup>	Min. tightening torque
WHKAQ-06 <sup>137)</sup>	M6	34.5	21.5	8	28	20	30N	0,8Nm
WHKAQ-10 <sup>137)</sup>	M6	50	33	8	28	20	30N	0,8Nm
WHKAQ-16 <sup>137)</sup>	M8	72	41	10	31	28	60N	1,5Nm
WHKAQ-20 <sup>137)</sup>	M8	90	62	10	31	28	70N	1,5Nm

<sup>67)</sup> Condition: dry rail surface<sup>137)</sup> Aluminium version available, suffix "-AL"<sup>137)</sup> The manual clamp is also available assembled as a complete carriage (suffix "-HKAQ", order example: WW-06-30-06-HKAQ). Dimensions complete carriage WWQ ▶ Page 934

## Accessories: Manual clamp for higher holding forces

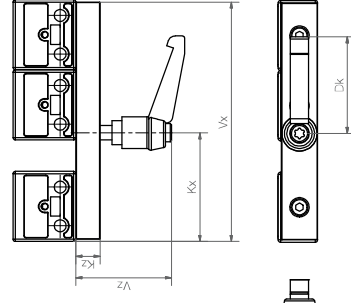

## Technical data and dimensions [mm]

Part No.	Mk	Vx	Kx	Vz	Kz	Dk	Min. holding force <sup>67)</sup>	Min. tightening torque
WHKD-1010 <sup>69)</sup>	M6	100	45	40	10	40	70N	2,5Nm
WHKD-1015 <sup>69)</sup>	M6	150	95	40	10	40	70N	2,5Nm
WHKD-1615 <sup>69)</sup>	M8	150	81	40	12	40	90N	3,5Nm
WHKD-1620 <sup>69)</sup>	M8	200	131	40	12	40	90N	3,5Nm
WHKD-2015 <sup>69)</sup>	M8	150	63	40	12	40	90N	3,5Nm
WHKD-2020 <sup>69)</sup>	M8	200	113	40	12	40	90N	3,5Nm

<sup>67)</sup> Condition: dry rail surface<sup>69)</sup> The manual clamp is also available assembled as a complete carriage (suffix "-HKA", order example: WW-10-40-10-HKD). Dimensions complete carriage WW ▶ Page 939

## drylin® W profile guides | Product range

Accessories: Manual clamp for drylin® W hybrid roller bearings




Order key

Type	Size	Material
Hybrid roller bearing		
Single roller bearing		
Stainless steel	Size 10	

**WJRM-21-10 - HKA**

Material  
ES: Stainless steel (AISI 316Ti)  
ES-FG: Stainless steel precision casting AISI 316  
AL: Aluminium

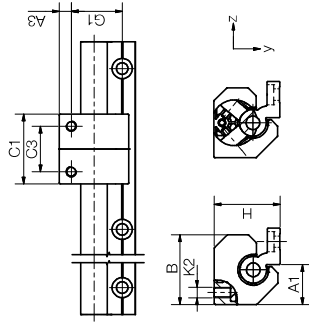

## Technical data and dimensions [mm]

Part No.	Weight	A1	A3	B	C1	C3	G1	H	K2 for screw	Kz	Max.
											g]
WJRM-21-10-HKA	115	16,5	6,5	31	35	22	27	28	M6	25	25
WJRM-21-16-HKA	250	25	9	44	48	30	32	41	M8	25	25
WJRM-21-20-HKA	320	30	9	52	52	34	38	49	M8	25	25

## drylin® W profile guides | Product range

Accessories: Liners and end caps for high profile rails

drylin® W plastic liners – long, open design



Size	Material	Pillow blocks	Liners Part No.	in the drylin® R-Chapter
10/16/20/25 (standard)	igidur® J200	WJ200JM-01-Ø	J200UMO-01-Ø <sup>70)</sup>	▶ Page 1026
10/16/20/25	igidur® J	WJUM-01-Ø	JUMO-01-Ø	▶ Page 1020
10/16/20/25 (high temperature)	igidur® X	WXUM-01-Ø	XUMO-01-Ø	▶ Page 1031
10/16/20/25	igidur® E7	WE7UM-01-Ø	E7UMO-01-Ø	▶ Page 1028

<sup>70)</sup> Available also as floating bearing, Part No. J200UMO-01-Ø-LL

drylin® W liners – long design, square



## Dimensions [mm]

Part No.	d1	d1 tolerance	d2	b1	r	t
J200QM-01-06	5,0	+0,020 +0,080	8	19	3,0	0,5
J200QM-01-10	7,5	+0,020 +0,080	12	28	3,0	0,8
J200QM-01-16	11,5	+0,020 +0,080	18	35	3,0	0,8
J200QM-01-20	15,0	+0,020 +0,080	23	44	3,5	0,8

Available also as floating bearing J200QM-01-Ø-LLZ (z-direction), J200QM-01-Ø-LLY (y-direction)

drylin® W plastic liners – adjustable



Size	Material	Pillow blocks	Liners Part No.
10 (adjustable)	igidur® J	WJUME-01-10	JUME-01-10
16/20 (adjustable)	igidur® J200	WJ200UME-01-Ø	J200UME-01-Ø

## Accessories: Liners

## drylin® W plastic liners



Size	Material	Pillow blocks	Liners Part No.
10	igtalur® J200	WJ200UMA-01-10-AL	J200UMA-01-10

## Replacement kit for WJ200UMA-01-10-AL pillow block


- Consisting of
- 4 liners **J200UMA-01-10**
  - 4 housing end caps **WRZ-0110071**
  - Assembly tool **MAT0051290**

 **Part No.:**  
**WEKA-01-10~J200**



## Accessories

## End caps for drylin® high profile rails WSX

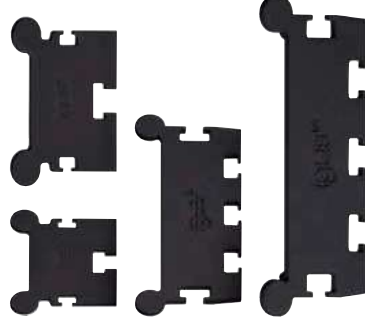

- For drylin® W high profile rails WSX
- ▶ **Page 937**
- 4 installation sizes
- Protection of the hollow chambers against the entry of foreign particle
- Easy to fit, easy sideways
- End caps for cutting edges

 **Part No.:**  
**WSX-063001-EC**  
**WSX-104001-EC**  
**WSX-108001-EC**  
**WSX-166001-EC**

## Slot nuts for mounting



- Variable positionable
- Ideal for drylin® limit and reference switches
- Suitable for T-slots of the drylin® WSX high-profile rails
- ▶ **Page 931, 937**
- Secure retention
- Can be retrofitted

 **Part No.:**  
**WSX-06-30**  
**WSX-06-60**  
**WSX-10-40**  
**WSX-10-80**  
**WSX-16-60**  
**WSX-16-60**

## Clamps for WSX high profile rails



- Secure mounting
- Variable positionable
- For drylin® SAW linear modules and ZLW toothed belt axes
- For drylin® WSX high-profile rails
- ▶ **Page 931, 937**

 **Part No.:**  
**ZLW-0630**  
**ZLW-0660**  
**ZLW-1040**  
**ZLW-1080**  
**ZLW-1660**