

**CEX slider for rail TEX 20, 30, 45**

Version 1 (with compact body for fixed rails)

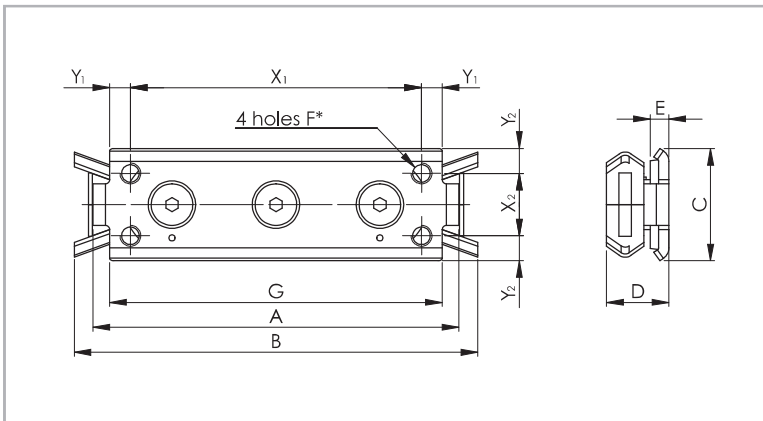


Fig. 11

\* For size 20: 2 M5 holes on the centreline with distance  $X_1$

Slider type	Size	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F	G [mm]	$X_1$ [mm]	$Y_1$ [mm]	$X_2$ [mm]	$Y_2$ [mm]	Weight [kg]
CEX20-80	20	80	90	18	11,5	5,5	M5	71	60	5,5	-	9	0,05
CEX30-88	30	88	97	27	15	4,5	M5	80	70	5	15	6	0,11
CEX45-150	45	150	160	40	22	4	M6	135	120	7,5	23	8,5	0,40

Tab. 5

Version 2 (with solid body for fixed rails)

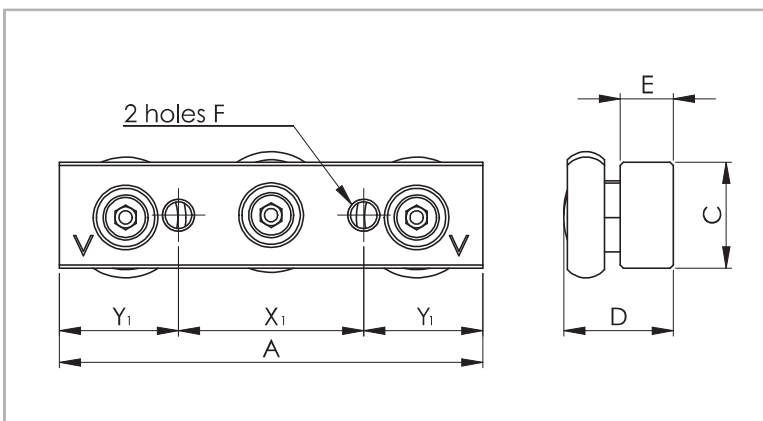


Fig. 12

Slider version with wipers on request

Slider type	Size	A [mm]	C [mm]	D [mm]	E [mm]	F	$X_1$ [mm]	$Y_1$ [mm]	Weight [kg]
CEX20-60	20	60	10	13	6	M5	20	20	0,04
CEX30-80	30	80	20	20,7	10	M6	35	22,5	0,17
CEX45-120	45	120	25	28,9	12	M8	55	32,5	0,47

Tab. 6

CEX slider for rail TEX 26, 40

Version 3 (with compact body for fixed rails)

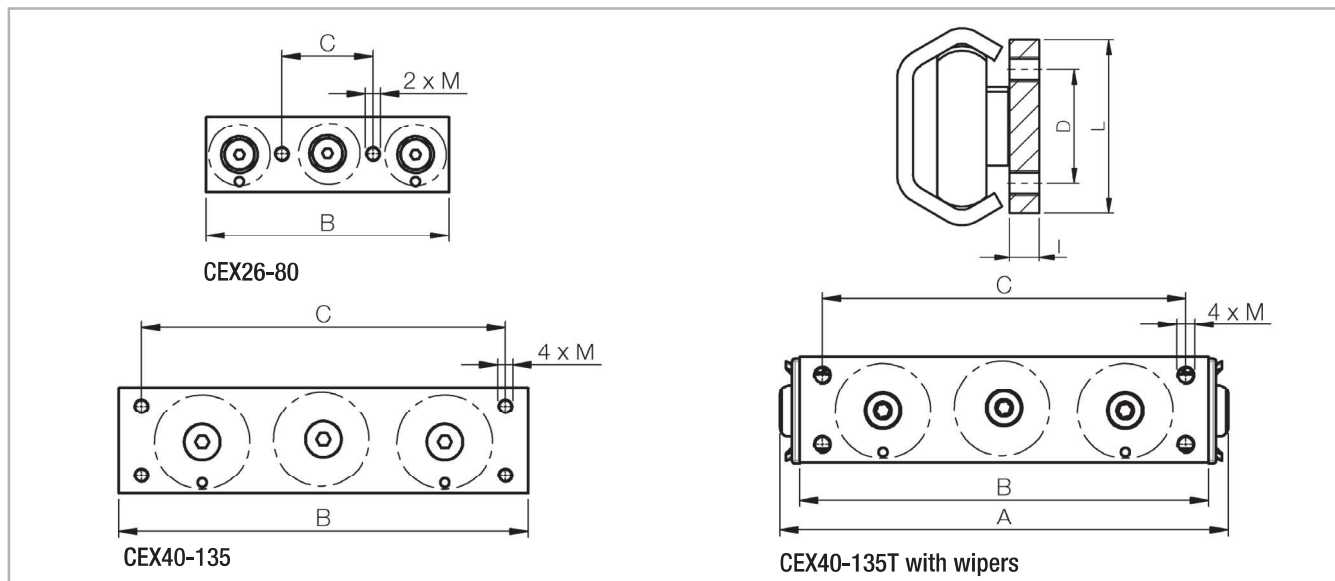


Fig. 13

Slider type	I [mm]	L [mm]	M	A [mm]	B [mm]	C [mm]	D [mm]	Weight [kg]
CEX26-80	4	20	M5	-	80	30	-	0.095
CEX40-135	6	35	M6	-	135	120	23	0.430
CEX40-135T				148				0.450

Tab. 7

> Load capacities

Fixed bearings TEX, TES, TEN

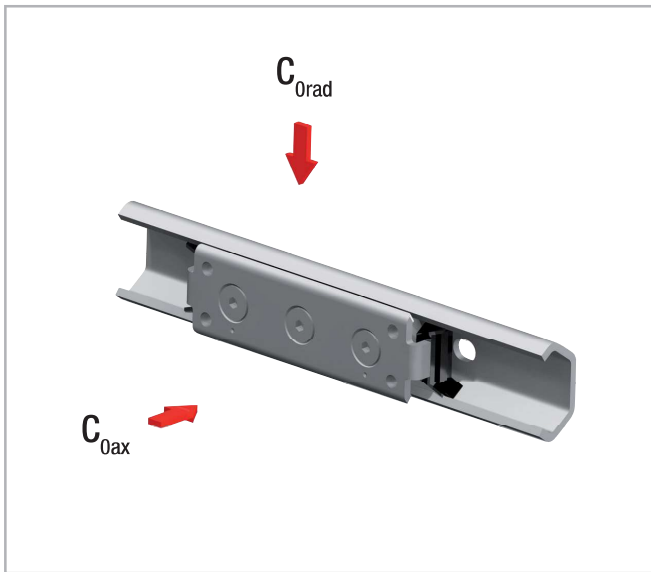


Fig. 8

Rail type	Configuration	$C_{Orad}$ [N]	$C_{0ax}$ [N]
TEX	TEX-20 – CEX20	300	170
	TEX-26 – CEX-26	800	400
	TEX-30 – CEX30	800	400
	TEX-40 – CEX-40	1600	800
	TEX-45 – CEX45	1600	860
TES	TES-20 – CES20	326	185
	TES-26 – CES-26	800	400
	TES-30 – CES30	870	435
	TES-40 – CES-40	1600	800
	TES-45 – CES45	1740	935
TEN	TEN-26 - CEN26-92	1120	380
	TEN-26 - CEN26-142	1520	540
	TEN-30 - CEN30-92	1200	420
	TEN-30 - CEN30-142	1620	580
	TEN-40 - CEN40-135	2400	820
	TEN-40 - CEN40-195	3240	1150

Resulting moment loads must be absorbed through the use of two sliders

Tab. 1

Compensating bearings UEX, UES, UEN

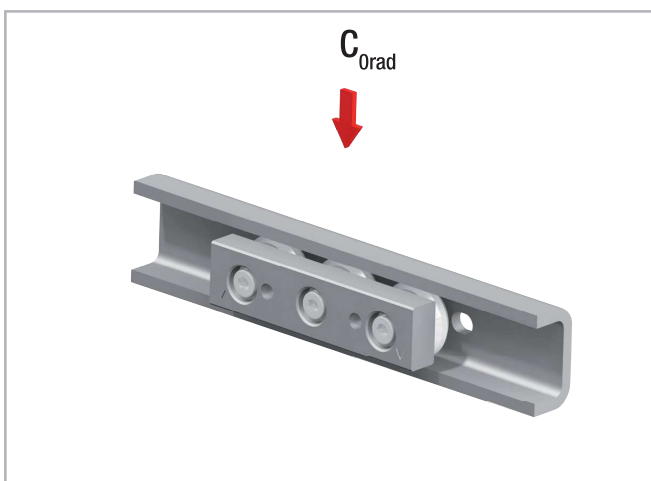


Fig. 9

Rail type	Configuration	$C_{Orad}$ [N]
UEX	UEX-20 – CEXU20	300
	UEX-30 – CEXU30	800
	UEX-45 – CEXU45	1600
UES	UES-20 – CESU20	326
	UES-30 – CESU30	870
	UES-45 – CESU45	1740
UEN	UEN-40 - CEN40-135	1850
	UEN-40 - CEN40-195	2460

Tab. 2