





Lifting-Door Guide Set


- Guide runs along the Line 8 groove
- For connecting door panel and counterweights
- Manual drive or Timing-Belt Reverse Unit drive possible



6

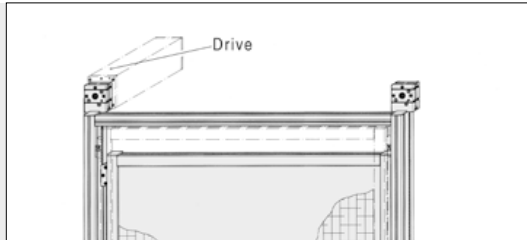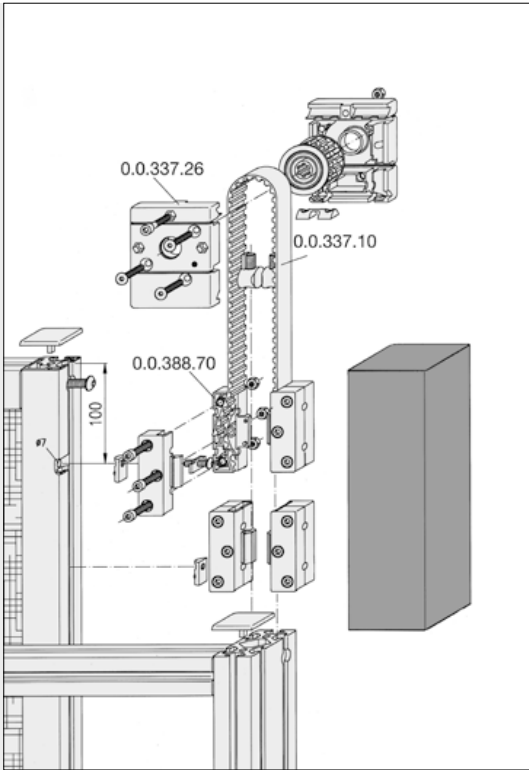

The use of Timing-Belt Reverse Units is a basic requirement for using drive units. The process of opening and closing lifting doors can thus be automated and integrated into manufacturing systems or transport sequences.



Lifting-Door Guide Set 8



- Housing halves, POM, black
- Steel insert, St, bright zinc-plated
- Button-Head Screw ISO 7380-M6x25, St, bright zinc-plated
- T-Slot Nut 8 St M6, bright zinc-plated
- 3 Cap Screws DIN 912-M6x25, St, bright zinc-plated
- 3 Hexagon Nuts DIN 934-M6, St, bright zinc-plated
- m = 94.0 g

1 set

0.0.388.70